

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C

D


E

F

G


H

P1



3,000MM± 50MM

P2



30MM± 0.3MM


27MM± 0.3MM

**Material:**


- Cable: NOUL 28AWG\* 25C+ D+ AL/MY  
- OD: 6.5MM  
- Color: Beige
- Connectors: DB 25 Pin Soder Type  
- Pin G/F  
- Shell: Ni-Plated  
- Insulator Color: Blue
- Inner Jacket: Clear LD-PE
- Outer Jacket: PVC 40P (Beige)
- Screw: # 4-40UNC Type, Nickel Plated

**Electrical:**

- 100% Open short & mis wire test
- Contact Resistance: 5Ω Max.
- Insulation Resistance: 10Ω Min.
- Hi-Pot: 300V DC / 10MS

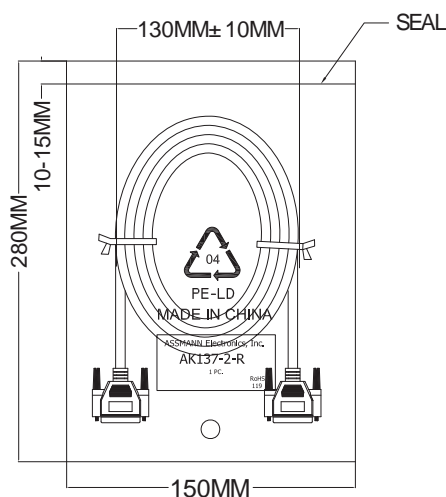

\* Pin Assignment 1:1

Scale	Free				Date	Name	Title	
TOLERANCE					Drawn	14.11.11	Chappell	
X.X	±0.40				Approved		ASSMANN WSW-No.	
X.XX	±0.25						AK162-3-R	
X.XXX	±0.15						Drawing-No.	
DIM	TOL						rev00	
X.°	±3°						Replace	Sheet
X.X°	±X°							1/1
Angle	TOL	Id.	Modification	Date	Name			

Unit: mm



1

2

3

4

5

6

7