

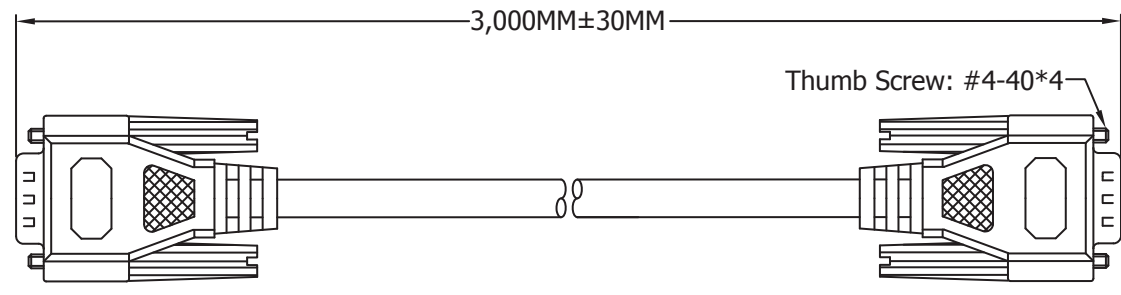


HDB 15 Male
Plastic: Blue



HDB 15 Male
Plastic: Blue



Material:

.CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER
JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*4C+
INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
COLOR:BEIGE OD:Ø8.1± 0.15mm UL-2919

.CONNECTOR:

P1&P2:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
(9TH PIN UNLOAD)

.SHIELD:COPPER-FOIL 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID
.HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.


.ELECTRONIC TEST:

- <1>.100% OPEN SHORT & MIS WIRE TEST
- <2>.CONTACT RESISTANCE 3 OHMS MAX.
- <3>.INSULATION RESISTANCE 1M OHMS MIN/ DC 5V

.PACKING:SEE P-0039 REV.C PACKING DRAWING

(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPE: DB VP4.

PIN OUT

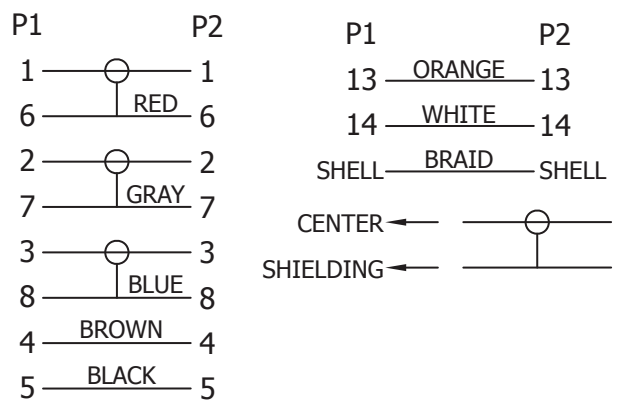

| | | | | | | | | |
|-----------|-------|--|--|--|--|----------|----------|--|
| Scale | 1:1 | | | | | | Name | Item No. |
| TOLERANCE | | | | | | Drawn | 10/26/12 | AK3760-3-R |
| X.X | ±0.40 | | | | | Approved | 10/26/12 | |
| X.XX | ±0.25 | | | | | | Groll | Title Premium VGA Monitor connection cable - HD D-Sub 15 pin Male <=> Male, 3 Meters |
| X.XXX | ±0.15 | | | | | | | |
| Angle | ±3° | | | | | | | Drawing No. |
| | | | | | | | | |
| | | | | | | | | rev00 |
| | | | | | | | | Replace |
| | | | | | | | | Sheet |

