



HDB 15 Male  
Plastic: Blue




P1

3,000MM±50MM

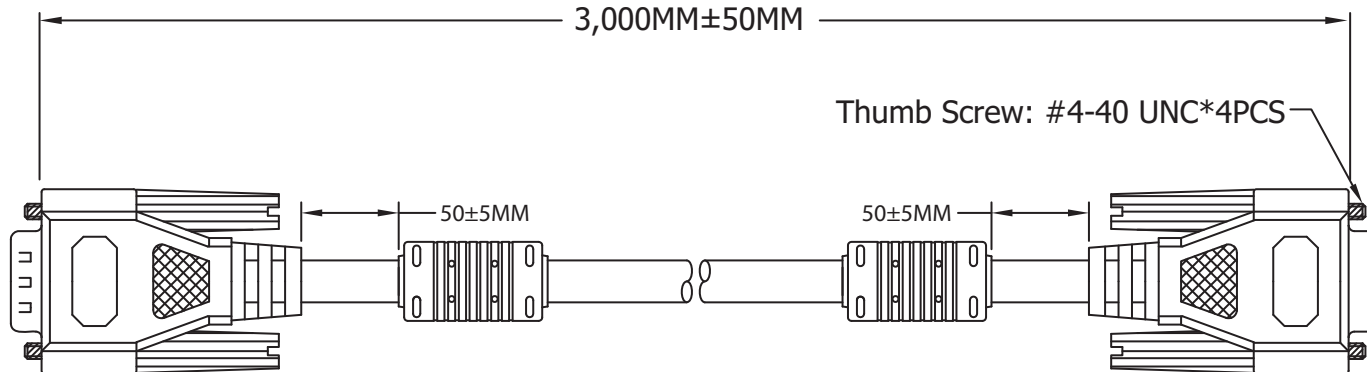

HDB 15 Female  
Plastic: Blue



P2

Thumb Screw: #4-40 UNC\*4PCS

**Material:**

- CABLE: 28AWG(7/0.127 T.C)\*3COAX(75 OHMS)+INSULATION:FO-PE INNER  
JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)\*7C+  
INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN  
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC  
COLOR:BEIGE,OD:Ø8.5± 0.15mm UL-2919
- CONNECTOR:  
P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL  
(THE 9TH PIN UNLOAD)  
P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
- FERRITE CORE:17.5\*28.5\*9.5mm
- SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- ELECTRONIC TEST: <1>.100% OPEN SHORT & MIS WIRE TEST  
<2>.CONTACT RESISTANCE 3 OHMS MAX  
<3>.INSULATION RESISTANCE 20M OHMS MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING  
(HANKING SIZE MUST BE SMALLER THAN PACKING)  
PACKING TYPF· DB VP4

**PIN OUT**



⊕ = Assmann logo



ITEM NO.

**AK3730XF-R**

TITLE

Premium XGA Monitor Extension Cable - 3 Meters  
w/Ferrite core, HD D-Sub 15-pin Male <=> Female

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2010 by Assmann Electronic Components  
All International Rights Reserved