

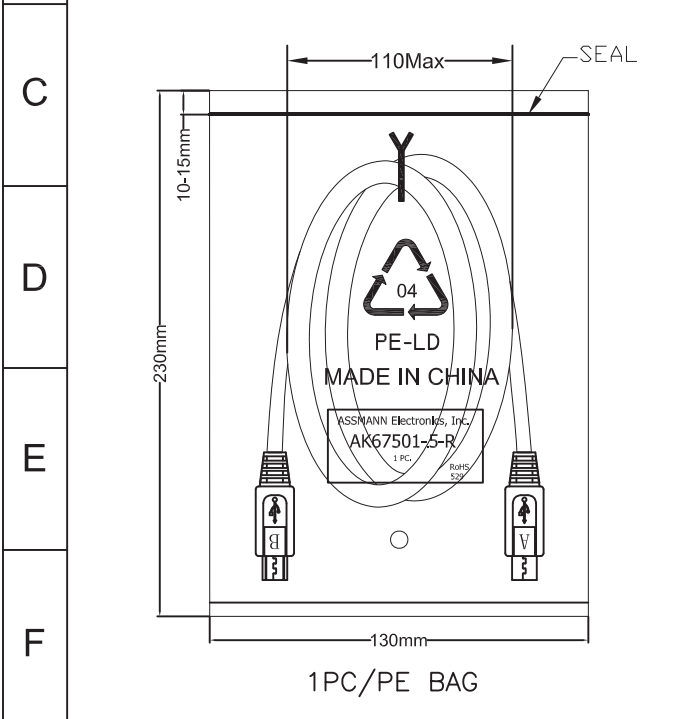


1 2 3 4 5 6 7

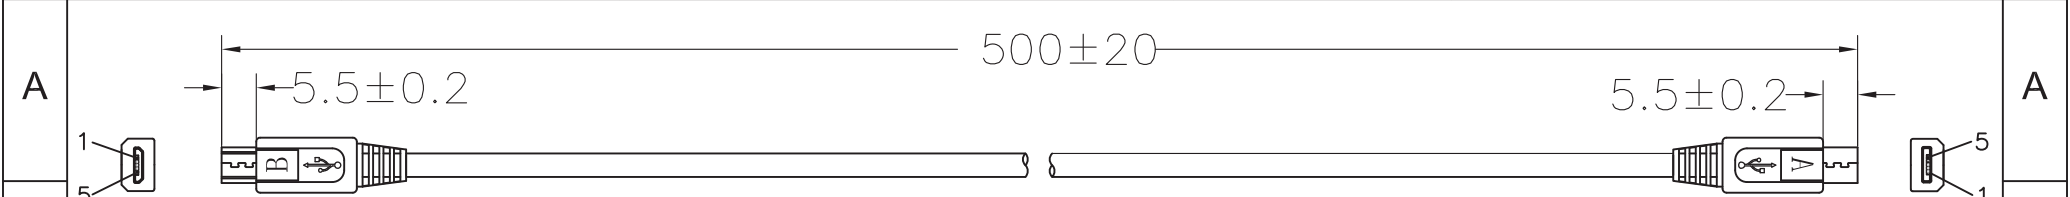

- Material:**
- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL:)*1P+ 28AWG(7/0.12TC)*2C]+AEB(48B TC)
 - Jacket: Black
 - OD: 3.5MM
 - P1 Connector: Micro USB 5P B/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
 - P2 Connector: Micro USB 5P A/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
 - Outer Jacket: Black PVC-40P

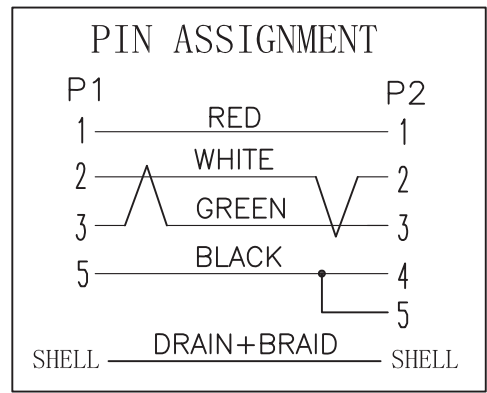

- Electrical:**
- 100% short, open, miswire test
 - Conduct resistance: ∞ Max.
 - Insulation resistance: 10M Ω Min.
 - Dielectric test: 300V DC

G	Scale	Free					Date	Name	Title USB 2.0 Micro Connection cable A type Male ↔ B type Male, 0.5 Meter ASSMANN WSW-No. AK67501-0.5-R
	TOLERANCE						Drawn	19.10.13	
H	Unit: mm								Drawing-No. rev01
		X.	±0.3				Approved		
X.X		±X							Sheet 1/1
	X.XX	±X							
	DIM	TOL							
	X.°	±X°							
	X.X°	±X°	①	Updated information	16.09.13	Wilson			
	Angle	TOL	Id.	Modification	Date	Name			
							1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		

1 2 3 4 5 6 7