


- Material:**
- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL:)\*1P+ 28AWG(7/0.12TC)\*2C]+AEB(48B TC)
    - Jacket: Black
    - OD: 3.5MM
  - P1 Connector: Micro USB 5P B/M Solder Type
    - Shell: Nickel
    - Pin: G/F
    - Insulator Color: Black
  - P2 Connector: Micro USB 5P A/M Solder Type
    - Shell: Nickel
    - Pin: G/F
    - Insulator Color: Black
  - Outer Jacket: Black PVC-40P

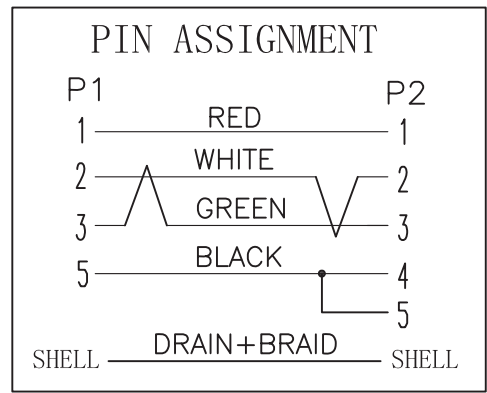

- Electrical:**
- 100% short, open, miswire test
  - Conduct resistance:  $\infty$  Max.
  - Insulation resistance: 10M $\Omega$  Min.
  - Dielectric test: 300V DC

G	Scale	Free					Date	Name	Title USB 2.0 Micro Connection cable A type Male ↔ B type Male, 1 Meter ASSMANN WSW-No. AK67501-1-R
	TOLERANCE						Drawn	19.10.13	
H	Unit: mm	X.	±0.3				Approved		Drawing-No. rev01
		X.X	±X						
X.XX		±X							
DIM		TOL							
	X.°	±X°							Sheet 1/1
	X.X°	±X°	①	Updated information	16.09.13	Wilson			
	Angle	TOL	Id.	Modification	Date	Name			