

A

A

B

B

C

C

D

D

E

E

F


F

G


G

H



H

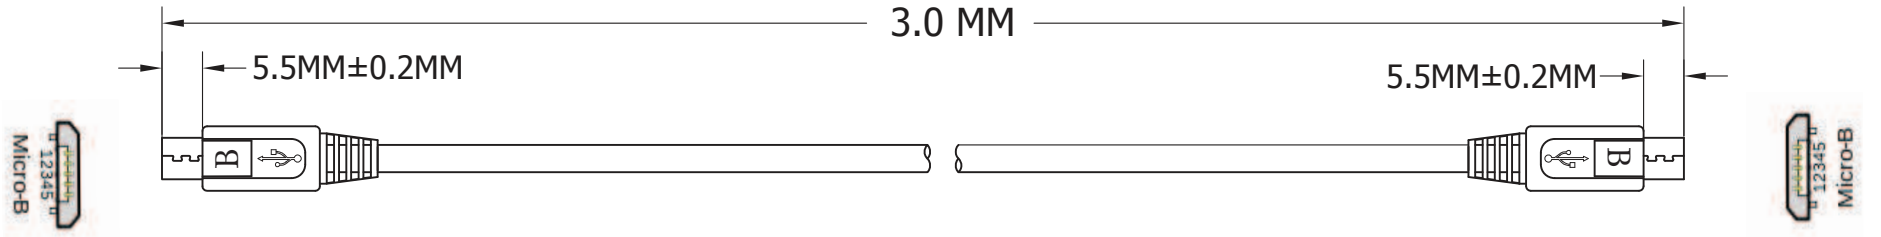

P1



P2

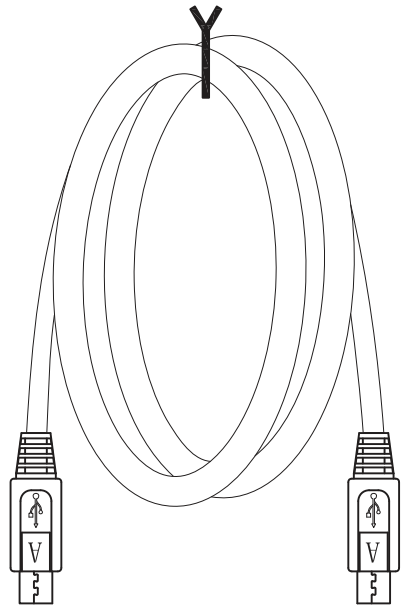

PIN ASSIGNMENT			
P1		P2	
1	RED	1	
2	WHITE	2	
3	GREEN	3	
5	BLACK	5	
SHELL	DRAIN + BRAID	SHELL	

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+A:)*1P+ 28AWG(7/0.12TC)*2C]+AEB(488 TC)
 - Jacket: Black
 - OD: 3.5MM
- Connectors: Micro USB 5P B/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- Outer Jacket: Black PVC-50P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Hi-Pot test: 300V DC



Scale	1:1							Name
TOLERANCE								Item No.
X.X	±0.40				Drawn	10/11/12	Miller	AK67401-3-R
X.XX	±0.25				Approved	10/11/12	Miller	
X.XXX	±0.15							Title
Angle	±3°							USB2.0 Micro Connection Cable, 3 Meters USB B Micro Male <=> USB B Micro Male
								Drawing No.
								Replace
								Sheet
					Modification	Date	Name	