


CONFIGURATION:

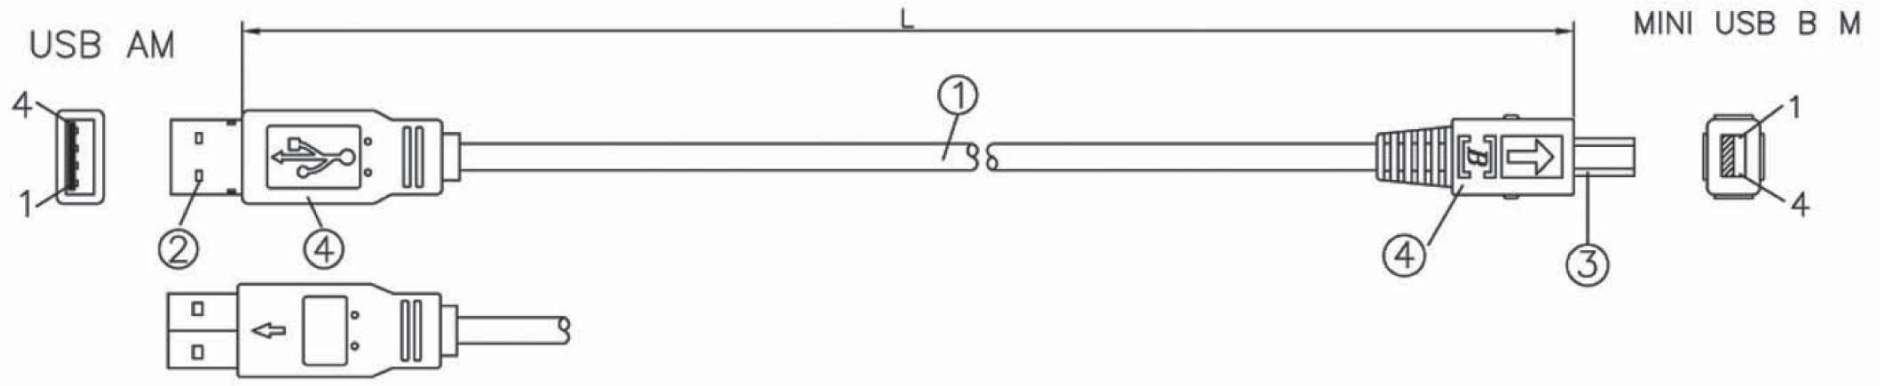


| ITEM NO | L |
|---|---|
| AK670M-1-R | 1000±30MM |
| AK670M-2-R | 2000±50MM |
| AK670M-3-R | 3000±50MM |
| AK670M-5-R | 5000±50MM |

**ELECTRECAL TEST:**

1.100% SHORT, OPEN, MISWIRE TEST

2.CONDUCT RESISTANCE: X Ohm (MAX.)
(0<L<3M:X=2; 3M≤L<10M:X=5; 10M≤L:X=10)

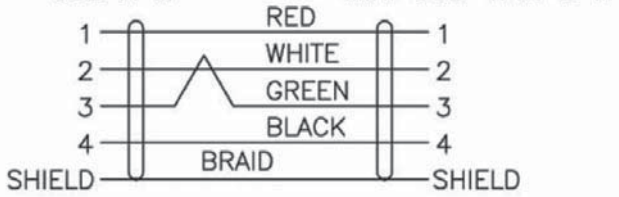3.INSULATION RESISTANCE: 10M Ohm (MIN.)

4.DIELECTRIC TEST: AC 300V

| NO. | DESCRIPTION |
|---|---|
| ④ | OUTER MOLD:45P PVC COLOR:BLACK(CS-001) |
| ③ | CONNECTOR:MINI USB 4P B PLUG SOLDER TYPE 3U" |
| ② | CONNECTOR:USB A MALE SOLDER TYPE 3U" INSULATION:WHITE |
| ① | CABLE:UL20276,28AWG*1P+28AWG*2C+AL/MY+SPIRAL,O.D:3.8MM<br>PVC JACKET COLOR:BLACK(CS-001) |

RoHS Complaint

| | |
|---|---|
| Scale | 1:1 |
| TOLERANCE | |
| X.X | ±0.40 |
| X.XX | ±0.25 |
| X.XXX | ±0.15 |
| Angle | ±3° |

| Modification | Date | Name |
|---|---|---|
| | | |

| | | Name |
|---|---|---|
| Drawn | 08.29.11 | Chappell |
| Approved | | |

ASSMANN WSW components

**Item No.**
**AK670M-X-R (Version 1.1)**
**AK670M/2-X-R (Version 2.0)**

**Title** USB 1.1 & 2.0, USB A Male to USB B Mini (4 pin)

Drawing No.

**rev00**

Replace

Sheet