



P1

P2

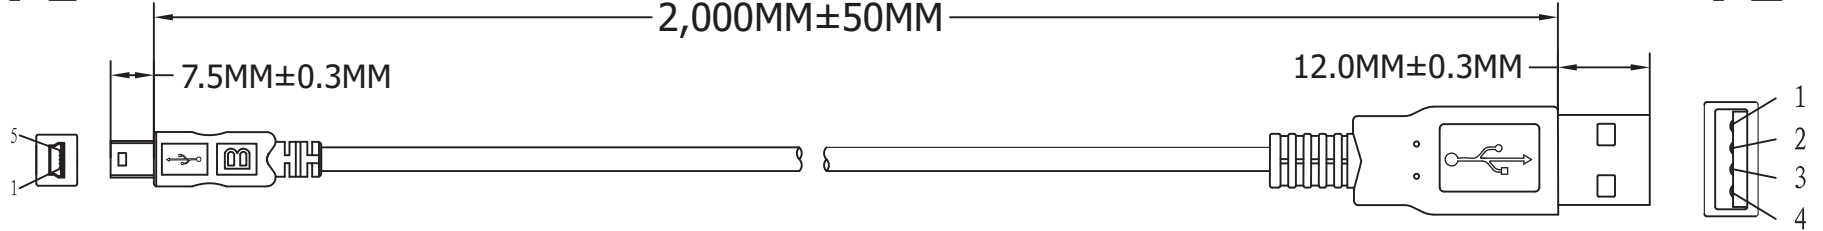

PIN ASSIGNMENT			
P1		P2	
1	RED	1	
2	WHITE	2	
3	GREEN	3	
5	BLACK	4	
SHELL DRAIN + BRAID		SHELL	

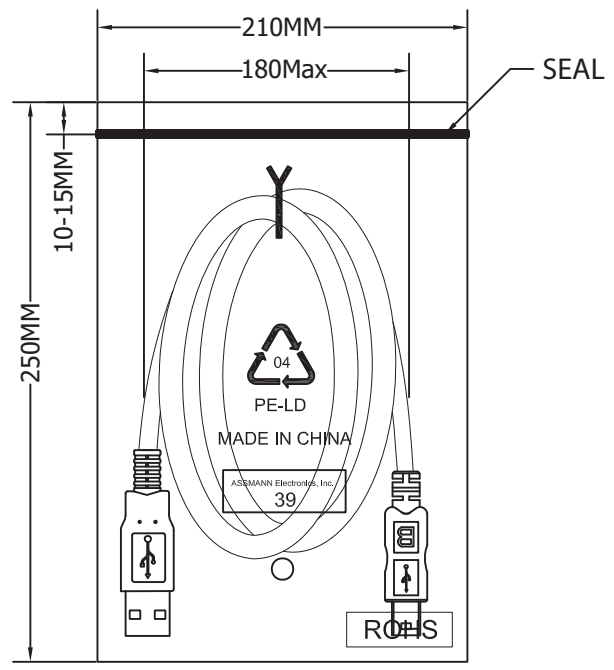

1PCS / PE BAG

Material:

- Cable: Black USB1.1 UL2725 28#/1P+28#/2C+AEB - OD: 3.8MM
- P1 Connector: USB Mini 5P Male
 - Pin: G/F
 - 3PCS Type
 - Insulator Color: Black
 - Shell: Nickel
 - Outer Jacket: Black PVC-40P
- P2 Connector: USB A Male
 - Pin: G/F
 - 4PCS Type
 - Insulator Color: White
 - Shell: Nickel
 - Outer Jacket: Black PVC-40

Electrical:

- 100% Open short & mis wire test
- Contact Resistance: 5Ω Max.
- Insulation Resistance: 10MΩ Min.
- Dielectric Test: 300V DC

Scale	1:1						Name	Item No. AK672M-2-R
TOLERANCE					Drawn	08.29.11	Chappell	
X.X	±0.40				Approved			Title USB 1.1 Mini Cable, Mini 5P Male <=> A Male, 2.0 Meter
X.XX	±0.25							
X.XXX	±0.15							Drawing No.
Angle	±3°							rev00
								Replace
								Sheet
		Modification	Date	Name				

