


Electrical Test:
 1. 100% short, open, miswire test
 2. Contractor Resistance: 2Ω Max.
 3. Insulation Resistance: 5Ω Min.

⑤	OUTER MOLD: PVC 45P COLOR BEIGE(CS-B02)
④	INNER MOLD: PE COLOR TRANSPARENT
③	CONNECTOR: USB A JACK SOLDER TYPE INSULATION: WHITE.
②	CONNECTOR: USB A PLUG SOLDER TYPE INSULATION: WHITE.
①	CABLE: UL2725 28AWG*1P+24AWG*2C+A.D+B65% O.D:4.7MM PVC JACKET COLOR BEIGE(CS-B02)
NO.	DESCRIPTION



Scale	1:1						Name	Item No. AK669-18-R (1.8 Meters) AK669-30-R (3.0 Meters) AK669-50-R (5.0 Meters)	
TOLERANCE						Drawn	08.29.11		Chappell
X.X	±0.40					Approved			
X.XX	±0.25							Title USB Extention Cable Version 1.1, USB A Male to USB A Female	
X.XXX	±0.15								
Angle	±3°							Drawing No.	
								Replace	Sheet

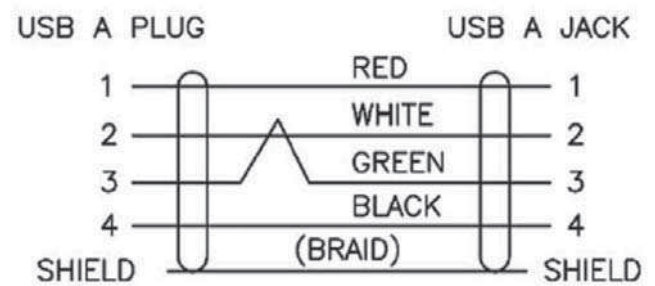

rev00