
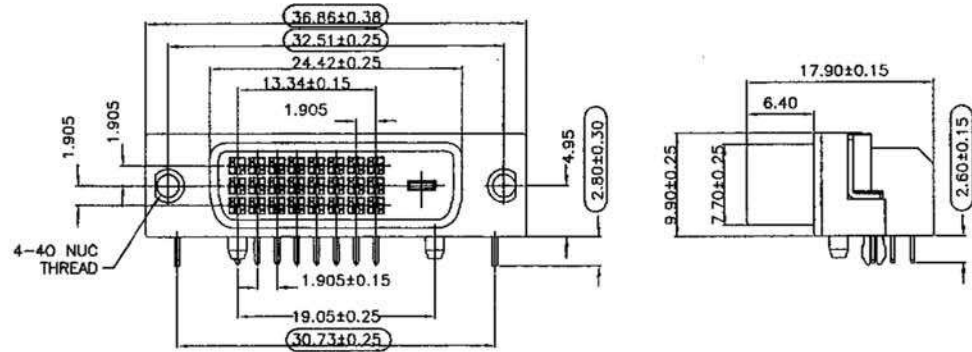


RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

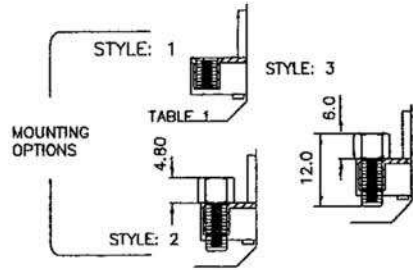

NOTES:

- 1.ENVIRONMENTAL: TEMPERATURE RANGE -20° TO +85°.
- 2.ELECTRICAL:
RATED: 1.5A @ 40V AC (ms)
CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM
INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE:500V AC (ms)
- 3.MECHANICAL:
MATING FORCE: 10 LB.(4.5Kg) MAXIMUM
UNMATING FORCE: 2.2LB.(1Kg) MINIMUM,8.8LB.(4Kg)MAXIMUM
- 4.MATERIAL:
HOUSING: GLASS FILLED THERMOPLASTIC,NATURAL,UL 94V-0
CONTACT: PHOSPHOR BRONZE
SHELL :NIRELOVER CU PLATED
BOARD LOCK : ZINC ALLOY,TIN PLATED

UNLESS OTHERWISE
SPECIFIED TOLERANCE

ANG.	±3°
.0	±0.30
.00	±0.20

RoHS
Compliant

ITEM NO
A-DVI-D-R

TITLE
DVI Connector integrated 24+5
Socket right angle type

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved