



PCB Layout Component Side Shown

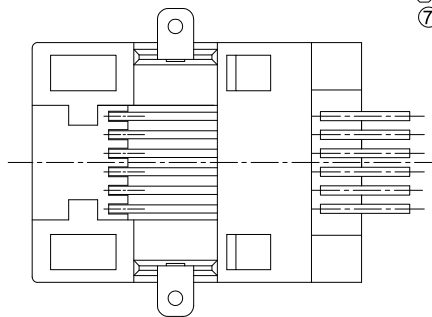

- NOTES:
- Mechanical:
- Housing material : PA9T UL94V-0 , Color: Black
 - Contact material: Phosphor Bronze t=0.35mm
 - Contact plating: 6u" Gold on contact area
Tin on solder side all over Nickel
 - Operating Life: 750 Cycles min.
 - PCB Retention Post-solder: 10 LBS min.
- Electrical:
- Voltage Rating: 125VAC.
 - Current Rating: 1.5AMP.
 - Contact Resistance: 35mΩ max.
 - Insulation Resistance: 1000MΩ min. @ 500 VDC
 - Dielectric Strength: 1000 VAC 60Hz, 1 min.
- Environmental:
- Storage: -40°C To +85°C
 - Operation: -40°C~+85°C
 - IR Reflow Soldering Temp: 255°C~265°C(5~10S)
- ⑦ Packing: 150pcs/Tape reel, 1500pcs/Carton

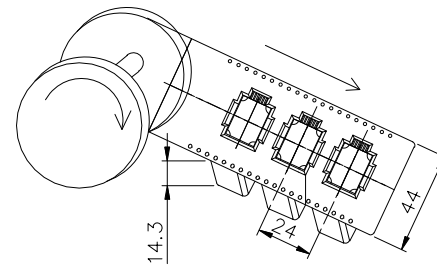

RoHS compliant
Unit:mm



File No.: E345352

Scale	Free						Date	Name	Customer-No.
TOLERANCE						Drawn	23.03.2005	Hellwig	
X.X	±0.20					Approved	27.05.2013	Amy	ASSMANN WSW-No. A-20041-LP/SMT-A
X.XX	±0.15	⑦	Update	27.05.2013	Amy				Drawing-No.
X.XXX	±0.10	⑥	Update	15.07.2009	Dean				ASS 1050B CO rev07
DIM	TOL	⑤	Drawing corrected	18.03.2009	N.Schulz				Replace
Angle	±5°	Id.	Modification	Date	Name				SHEET

