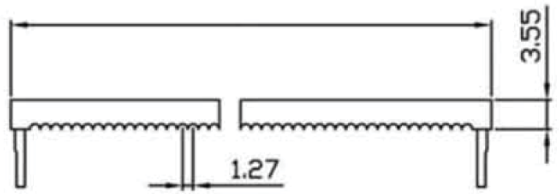



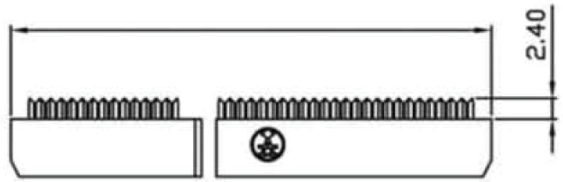



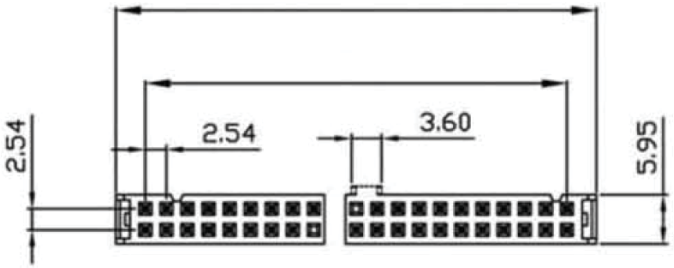



Materials:

- Insulator: P.B.T. 30% Glass Fiber, UL94V-0
- Contact Material: Phosphor Bronze
- Underplate: Nickel
- Contact Area: Gold Flash Selective
- Operating Temperature: -55°C~+105°C

Electrical:

- Current Rating: 1 Amp
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC

Unit of Measure: MM±0.1

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.19.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AWP64-7240-T-R**

Title IDC-Socket - 64 Contact w/o Strain Relief Pitch 2.54 x 2.54MM, Central Guide Lug

Drawing No. **rev00**

Replace | Sheet