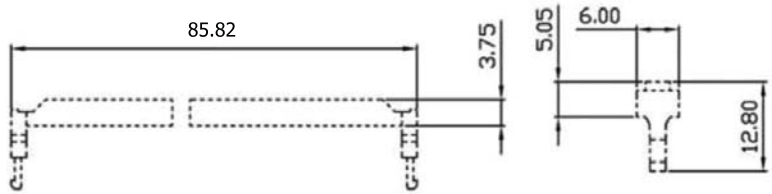

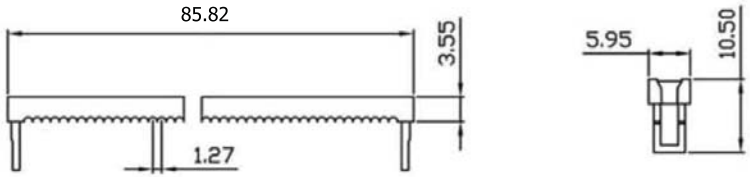

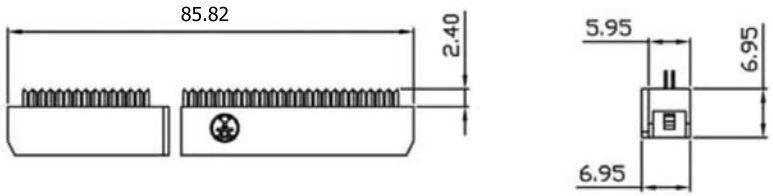

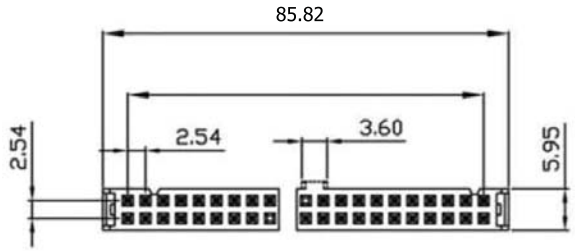



Materials:

- Insulator: P.B.T. 30% Glass Fiber, UL94V-0
- Contact Material: Phosphor Bronze
- Underplate: Nickel
- Contact Area: Gold Flash Selective
- Operating Temperature: -55°C~+105°C

Electrical:

- Current Rating: 1 Amp
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC

Unit of Measure: MM±0.1

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.19.11	Chappell
Approved		

Item No. **AWP64-7241-T-R**

Title IDC-Socket -64 Contacts w/Strain Relief Pitch 2.54x2,54MM, Central Guide Lug

Drawing No. **rev00**

Replace | Sheet

RoHS Complaint

ASSMANN WSW components