

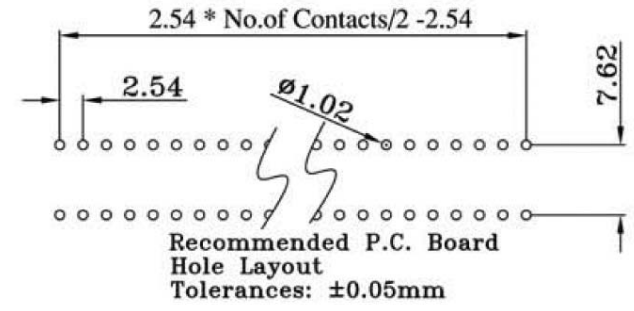

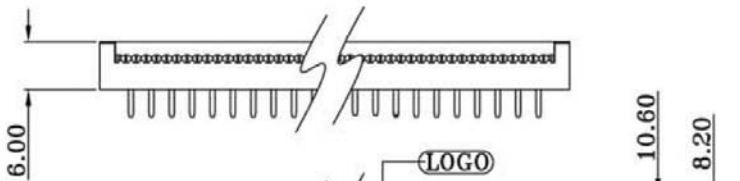




A




B

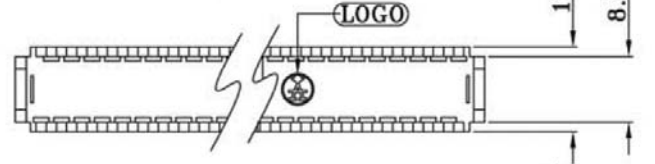

C

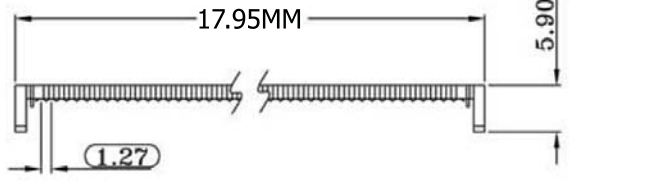

D

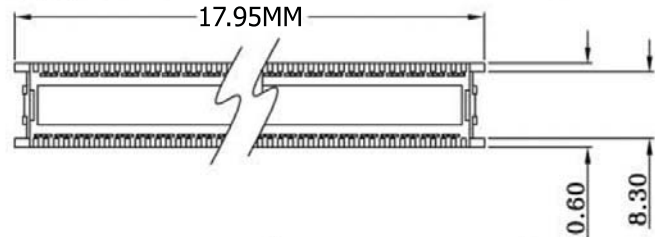



Materials:

- Insulator: P.B.T. 30%Glass Fiber, UL94V-0
- Contacts: Brass, Full Tin over Nickel

Electrical:

- Current Rating: 1AMP
- Contact Resistance: 20μ"ΜΩ Max / 1A DC
- Insulation Resistance: 1,000ΜΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C

E

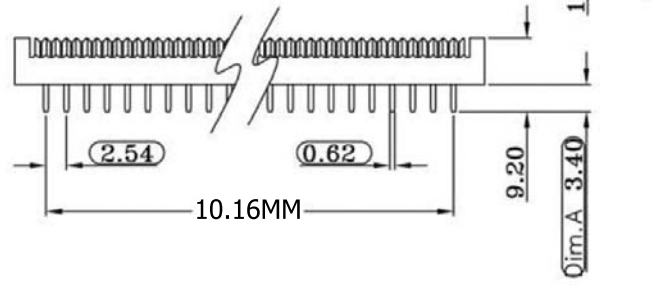

F

G

Scale	1:1						Name	Item No.	
TOLERANCE					Drawn	10.28.11	Chappell	ADIP10-Z-LC-R	
X.X	±0.40								Title
X.XX	±0.25								DIP-Connector, 2.54 x 7.62MM, 10 Contacts, Tin Plated
X.XXX	±0.15								Drawing No.
Angle	±3°								rev00
								Replace	
								Sheet	



A

B

C

D

E

F

G

H