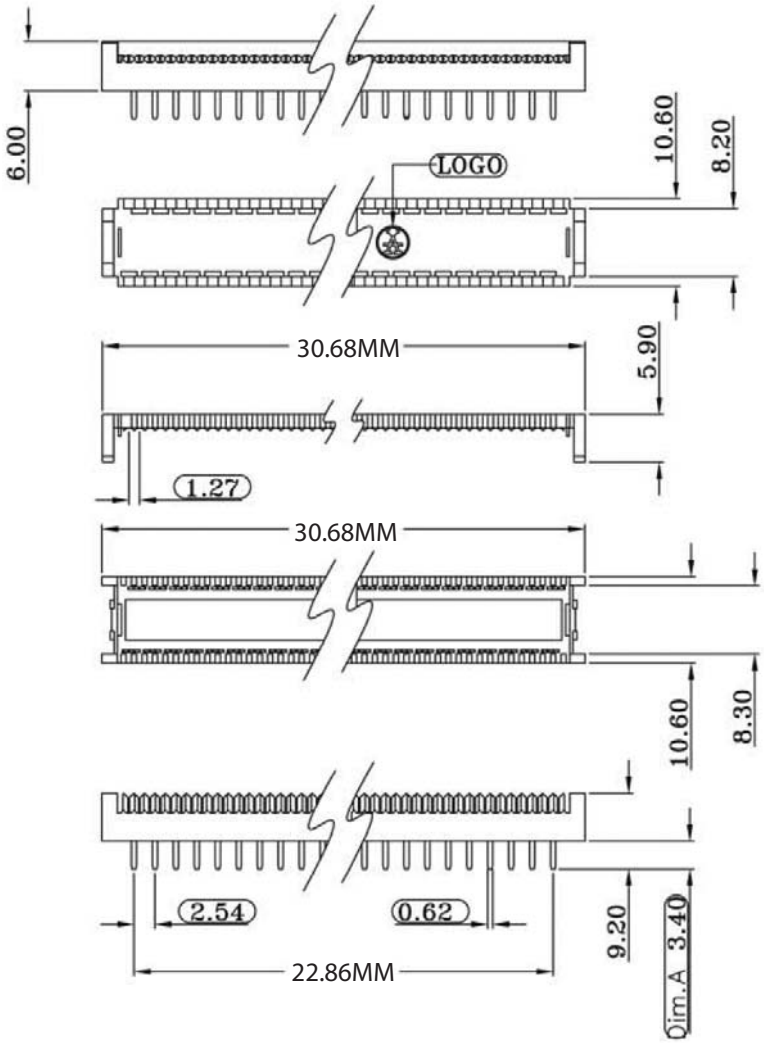

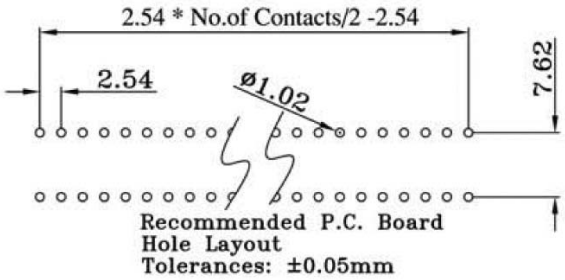







Materials:

- Insulator: P.B.T. 30%Glass Fiber, UL94V-0
- Contacts: Brass, Gold Flash over Nickel
- Contact Plating: Flash Gold Selective, 10μ" or 30μ" of Gold

Electrical:

- Current Rating: 1AMP
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C



RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.28.11	Chappell
Approved		

ASSMANN WSW components

Item No. **ADIP20-G-LC-R**

Title DIP Connector, 2.54 x 7.62MM, 20 Contacts, Gold Plated

Drawing No. **rev00**

Replace | Sheet