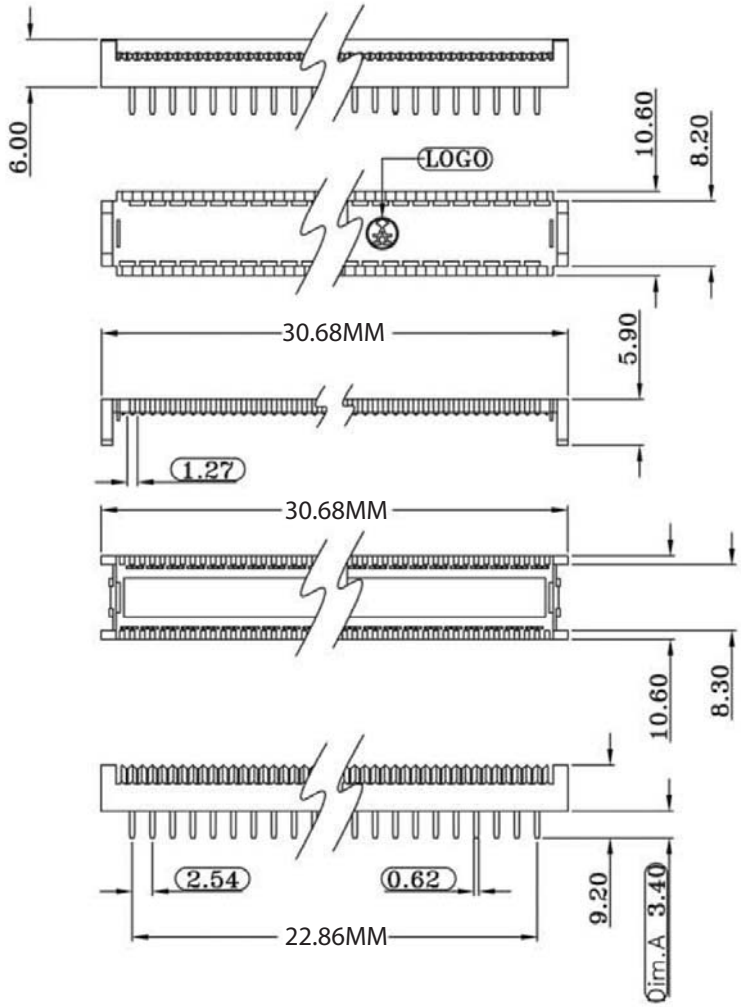









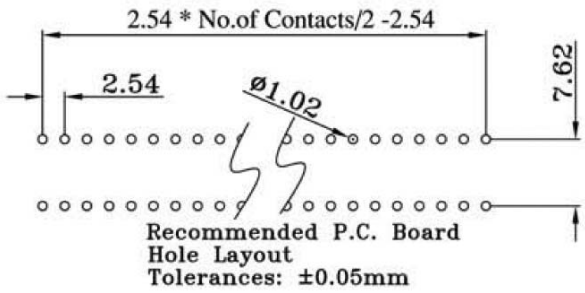

Materials:

- Insulator: P.B.T. 30%Glass Fiber, UL94V-0
- Contacts: Brass, Full Tin over Nickel

Electrical:

- Current Rating: 1AMP
- Contact Resistance: 20μ"MΩ Max / 1A DC
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.28.11	Chappell

ASSMANN WSW components

Item No. **ADIP20-Z-LC-R**

Title DIP-Connector, 2.54 x 7.62MM, 20 Contacts, Tin Plated

Drawing No. **rev00**

Replace | Sheet