

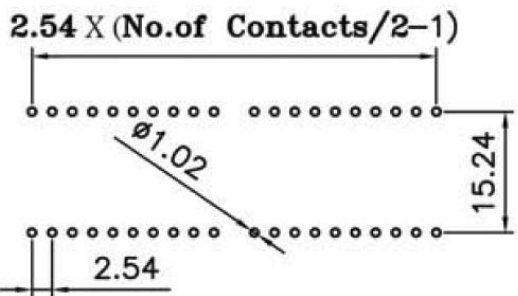

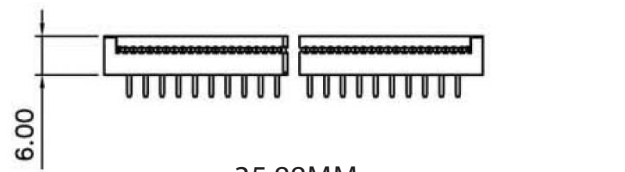




A




B

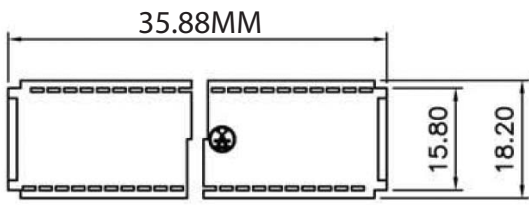



C

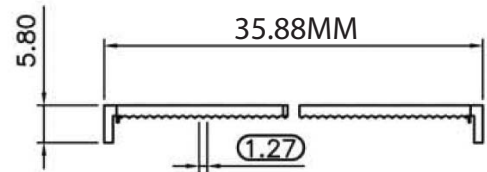

D

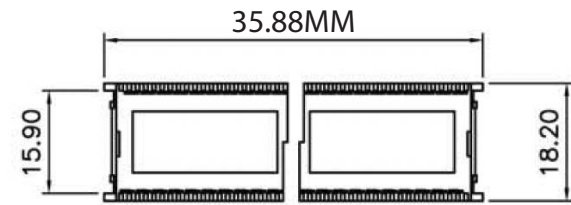

E

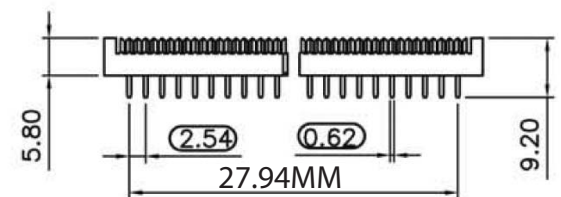

Materials:

- Insulator: P.B.T. 30%Glass Fiber, UL94V-0
- Contacts: Brass, Full Tin over Nickel

Electrical:

- Current Rating: 3AMP
- Contact Resistance: 20μ”MΩ Max / 1A DC
- Insulation Resistance: 5,000MΩ Min.
- Dielectric Withstanding: 1,000V AC
- Operating Temperature: -40°C ~ +105°C

G

Scale	1:1						Name	Item No. ADIP24-Z-LC-R
TOLERANCE					Drawn	10.28.11	Chappell	
X.X	±0.40				Approved			Title DIP-Connector, 2.54 x 15.24MM, 24 Contacts, Tin Plated
X.XX	±0.25							Drawing No.
X.XXX	±0.15							rev00
Angle	±3°							
								Replace
								Sheet
			Modification	Date	Name			



A

B

C

D

E

F

G

H