



P1

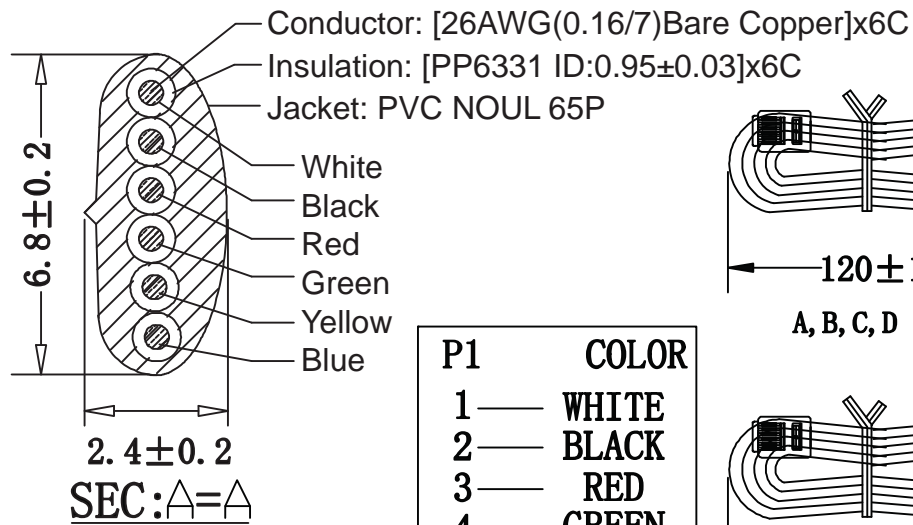


Conductor: [26AWG(0.16/7)Bare Copper]x6C  
 Insulation: [PP6331 ID:0.95±0.03]x6C  
 Jacket: PVC NOUL 65P

White  
 Black  
 Red  
 Green  
 Yellow  
 Blue

P1	COLOR
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE



A, B, C, D




E, F, G

**Note:**

- Material: Housing-polycarbonate, clear
- Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder.
- Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-6/6/B-5-OE-R	A	1,525±20(5ft)	Black	1,525-1,535mm
AT-S-26-6/6/B-7-OE-R	B	2,135±30(7ft)	Black	2,135-2,145mm
AT-S-26-6/6/B-10-OE-R	C	3,050±60(10ft)	Black	3,050-3,060mm
AT-S-26-6/6/B-12-OE-R	D	3,660±60(12ft)	Black	3,660-3,670mm
AT-S-26-6/6/B-14-OE-R	E	4,270±60(14ft)	Black	4,270-4,280mm
AT-S-26-6/6/B-25-OE-R	F	7,625±100(25ft)	Black	7,625-7,635mm
AT-S-26-6/6/B-50-OE-R	G	15,250±150(50ft)	Black	15,250-15,260mm

Scale	Free					Date	Name	Title Modular cable - Straight/Open 6P6C 50µ", 26AWG, Black, 5-50 feet
TOLERANCE						Drawn	28.06.13	
X.	±X					Approved	28.06.13	Groll
X.X	±X							
X.XX	±X							
DIM	TOL							
X.°	±X°							
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name			Drawing-No.
								Replace

Unit: mm



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title Modular cable - Straight/Open 6P6C 50µ", 26AWG, Black, 5-50 feet	
ASSMANN WSW-No. AT-S-26-6/6/B-xx-OE-R	
Drawing-No.	rev00
Replace	Sheet 1/1