



P1

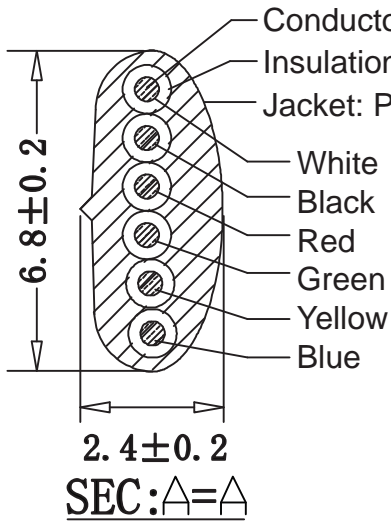


Conductor: [26AWG(0.16/7)Bare Copper]x6C
 Insulation: [PP6331 ID:0.95±0.03]x6C
 Jacket: PVC NOUL 65P

White
 Black
 Red
 Green
 Yellow
 Blue

P1	COLOR
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE



A, B, C, D



E, F, G

Note:

- Material: Housing-polycarbonate, clear
- Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder.
- Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-6/6/W-5-OE-R	A	1,525±20(5ft)	White	1,525-1,535mm
AT-S-26-6/6/W-7-OE-R	B	2,135±30(7ft)	White	2,135-2,145mm
AT-S-26-6/6/W-10-OE-R	C	3,050±60(10ft)	White	3,050-3,060mm
AT-S-26-6/6/W-12-OE-R	D	3,660±60(12ft)	White	3,660-3,670mm
AT-S-26-6/6/W-14-OE-R	E	4,270±60(14ft)	White	4,270-4,280mm
AT-S-26-6/6/W-25-OE-R	F	7,625±100(25ft)	White	7,625-7,635mm
AT-S-26-6/6/W-50-OE-R	G	15,250±150(50ft)	White	15,250-15,260mm

Unit: mm



Scale	Free				Date	Name	Title
TOLERANCE					Drawn	28.06.13	Wilson
X.	±X				Approved	28.06.13	Groll
X.X	±X						
X.XX	±X						
DIM	TOL						
X.°	±X°						
X.X°	±X°						
Angle	TOL	Id.	Modification	Date	Name		



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
 Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title		Modular cable - Straight/Open	
		6P6C 50µ", 26AWG, White, 5-50 feet	
ASSMANN WSW-No.		AT-S-26-6/6/W-xx-OE-R	
Drawing-No.			
		rev00	
Replace		Sheet	
		1/1	