

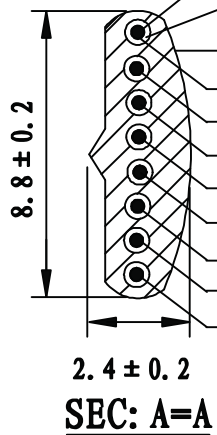


P1

- Conductor: [26AWG(0.16/7)Bare Copper]x8C
- Insulation: [PP6331 ID:0.95±0.03]x8C
- Jacket: PVC NOUL 65P
- White
- Orange
- Black
- Red
- Green
- Yellow
- Blue
- Brown



P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN



Note:

- Material: Housing-polycarbonate, clear
- Terminal-0.36[.014] thick phosphor bronze.
- Thick gold in localized gold plate.
- Area, Gold Flash over the remainder.
- Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-8/8/W-5-OE-R	A	1,525±20(5ft)	White	1,525-1,535mm
AT-S-26-8/8/W-7-OE-R	B	2,135±30(7ft)	White	2,135-2,145mm
AT-S-26-8/8/W-10-OE-R	C	3,050±60(10ft)	White	3,050-3,060mm
AT-S-26-8/8/W-12-OE-R	D	3,660±60(12ft)	White	3,660-3,670mm
AT-S-26-8/8/W-14-OE-R	E	4,270±60(14ft)	White	4,270-4,280mm
AT-S-26-8/8/W-25-OE-R	F	7,625±100(25ft)	White	7,625-7,635mm
AT-S-26-8/8/W-50-OE-R	G	15,250±150(50ft)	White	15,250-15,260mm

Unit: mm



Scale	Free					Date	Name	Title Modular cable - Straight/Open 8P8C 50µ", 26AWG, White, 5-50 feet
TOLERANCE						Drawn	01.07.13	
X.	±X					Approved	01.07.13	Groll
X.X	±X							
X.XX	±X							
DIM	TOL							
X.°	±X°							
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name			

Drawing-No.		rev00
Replace	Sheet 1/1	

ASSMANN
WSW components
1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us