




P1

"L"

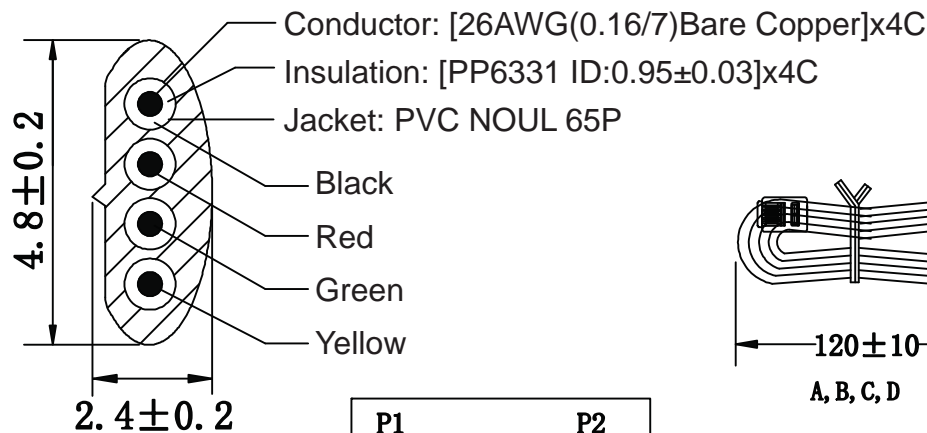

SEC:A-A

P1		P2
1	BLACK	1
2	RED	2
3	GREEN	3
4	YELLOW	4



Note:

- Material: Housing-polycarbonate, clear
- Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder.
- Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-4/4/B-5-OE-R	A	1,525±20(5ft)	Black	1,525-1,535mm
AT-S-26-4/4/B-7-OE-R	B	2,135±30(7ft)	Black	2,135-2,145mm
AT-S-26-4/4/B-10-OE-R	C	3,050±60(10ft)	Black	3,050-3,060mm
AT-S-26-4/4/B-12-OE-R	D	3,660±60(12ft)	Black	3,660-3,670mm
AT-S-26-4/4/B-14-OE-R	E	4,270±60(14ft)	Black	4,270-4,280mm
AT-S-26-4/4/B-25-OE-R	F	7,625±100(25ft)	Black	7,625-7,635mm
AT-S-26-4/4/B-50-OE-R	G	15,250±150(50ft)	Black	15,250-15,260mm

Unit: mm



Scale	Free				Date	Name	Title	
TOLERANCE					Drawn	28.06.13	Wilson	Modular cable - Straight/Open 4P4C 50µ", 26AWG, Black, 5-50 feet
X.	±X				Approved	28.06.13	Groll	ASSMANN WSW-No. AT-S-26-4/4/B-xx-OE-R
X.X	±X							Drawing-No.
X.XX	±X							rev00
DIM	TOL							Replace
X.°	±X°							Sheet
X.X°	±X°							1/1
Angle	TOL	Id.	Modification	Date	Name			
						<small>1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</small>		



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us