

Extended length is with 500g of force


**Material:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm [0.000100] thick nickel underplate
- Conductor(X8C): 26AWG (0.12X12) Bare Copper
- Insulation(X8C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

P1	P2
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

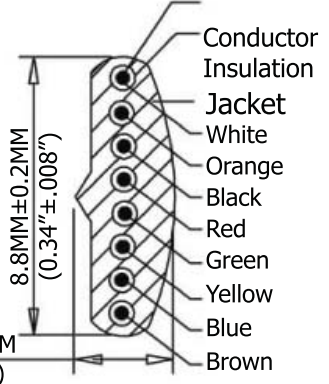

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345 Inches	126.0 Inches
7,620.0MM-8,763.0MM	3,200.4MM

**SEC: A-A**



Scale	1:1						Name
TOLERANCE					Drawn	11.02.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
Modification				Date	Name		

Item No.	<b>AT-C-26-8/8/W-25/R-R</b>
Title	NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Reverse Plug, 50µ" of contact plating, WHITE
Drawing No.	
Replace	rev00
Sheet	