


N=Number of contacts

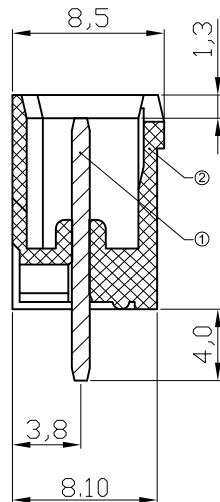

**NOTES:**

**MATERIAL**


- 1.Item Ⓞ Contact pin: Brass(CuZn)Tin plated
- 2.Item Ⓞ Insulator (housing):Thermoplastic (UL 94V-0),green

**ELECTRICAL**

- 1.Current Rating : 20A
- 2.Voltage Rating : 300V
- 3.Withstand Voltage : 1.6KV

**ENVIRONMENTAL**

- 1.Soldering Temperature: 250°C ±10°C/5 Sec
- 2.Operating Temperature: -40°C to +115°C
- 3.Safety approval: cULus

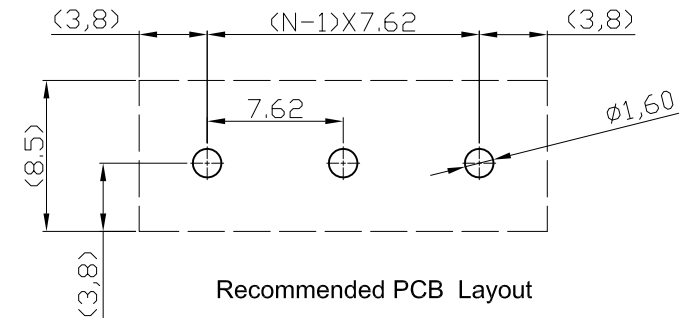

Recommended PCB Layout

**RoHS compliant**

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	19.03.2009	Dean	
X.	±0.50					Approved	19.03.2009	Hellwig	ASSMANN WSW-No.
X.X	±0.30								<b>A-TB762-OQXXCV</b>
X.XX	±0.10								Drawing-No.
DIM	TOL								<b>ASS 3419 CO</b>
X.°	±1°								rev01
X.X°	±X°	①	Drawn	19.03.2009	Dean			Replace	Sheet
Angle	TOL	Id.	Modification	Date	Name				



**ASS 3419 CO** rev01

Replace Sheet