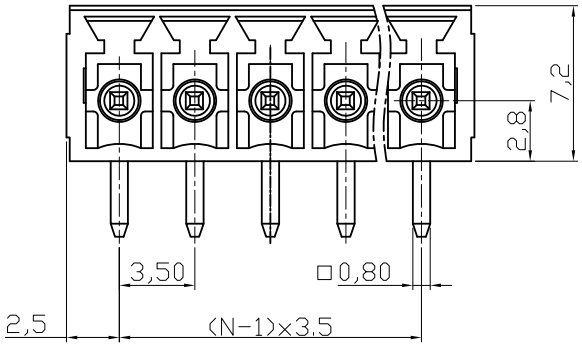

P.C.B LAYOUT

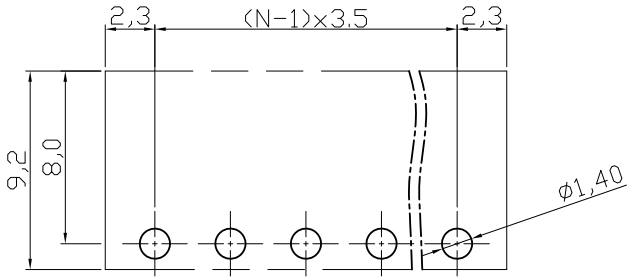

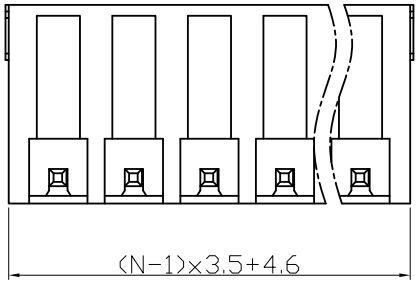

N= NUMBER OF CONTACTS

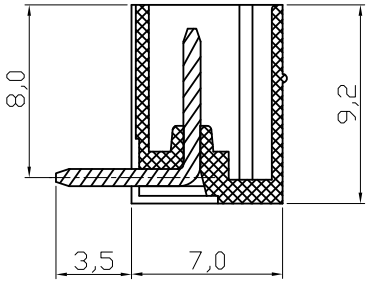

Material

Terminal body
(contact pin): Brass(CuZn) Tin plated
Insulator (housing): Thermoplastic (UL94V-0),Green

Electrical cULus/ CSA /VDE

Voltage rating: 300VAC/125VAC/125VAC
Current rating: 10A/8A/10.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Withstanding Voltage: 1.6KV/1.6KV/2.5KV
Operating temperature: -30°C to +105°C
Soldering temperature: 250°C±10°C/5 Sec
Safety Approval:

RoHS compliant

Scale	1:1
TOLERANCE	
X.	±0.50
X.X	±0.30
X.XX	±0.10
DIM	TOL
X.°	±1°
Angle	TOL

Id.	Modification	Date	Name
②	Modify Notes	10.12.2009	Dean
①	Drawn	29.07.2009	Dean

	Date	Name
Drawn	29.07.2009	Dean
Approved	10.12.2009	Hellwig

ASSMANN components

Customer-No.

ASSMANN WSW-No.
A-TB350-OQxxCH

Drawing-No.
ASS 3601 CO

rev02

Replace

Sheet