


**Material**

- ① Terminal body(metal housing): Brass(CuZn),Tin plated
- ② Terminal screw: Steel Zinc plating "-" slot type
- ③ Wire guard: Stainless steel
- ④ Insulator (housing): Thermoplastic (UL94V-0) BLACK

**Electrical UL**

- Voltage rating: 125V
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-26
- Stranded wire(AWG): 16-26
- Torque(Lb-In): 1.7Lb-In
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.25KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

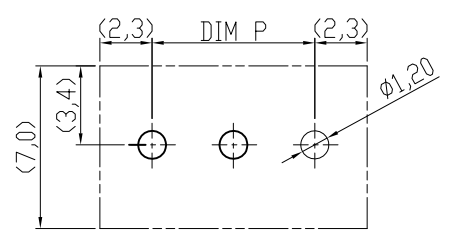

RECOMMENDER PCB LAYOUT

**DIMENSION**

L	Nx3,5
P	(N-1)x3,5

N=Number of poles

Poles	Tolerance	
	DIM L	DIM P
2p-6p	±0.10	±0.10
7p-12p	±0.20	±0.15
13p-18p	±0.30	±0.25
19p-24p	±0.40	±0.35

**RoHS compliant**

Scale	1:1					Date	Name	Customer-No.
TOLERANCE						Drawn	19.04.2010	Alex
X.	±0.50					Approved	19.04.2010	Hellwig
X.X	±0.30							
X.XX	±0.10							
DIM	TOL							Drawing-No.
X.°	±1°							<b>ASS 4091 CO</b>
		①	Drawn	19.04.2010	Alex			rev00
Angle	TOL	Id.	Modification	Date	Name			Replace

ASSMANN WSW-No.  
**A-TB350-TExx**

