


REV.	DATE	DESCRIPTION
A	01/28/03	REVISE BODY DIMENSIONS
B	04/29/04	REMOVED CENTER CONTACT PIN
C	12/30/04	MODIFY BARREL I.D. TO 1.7mm

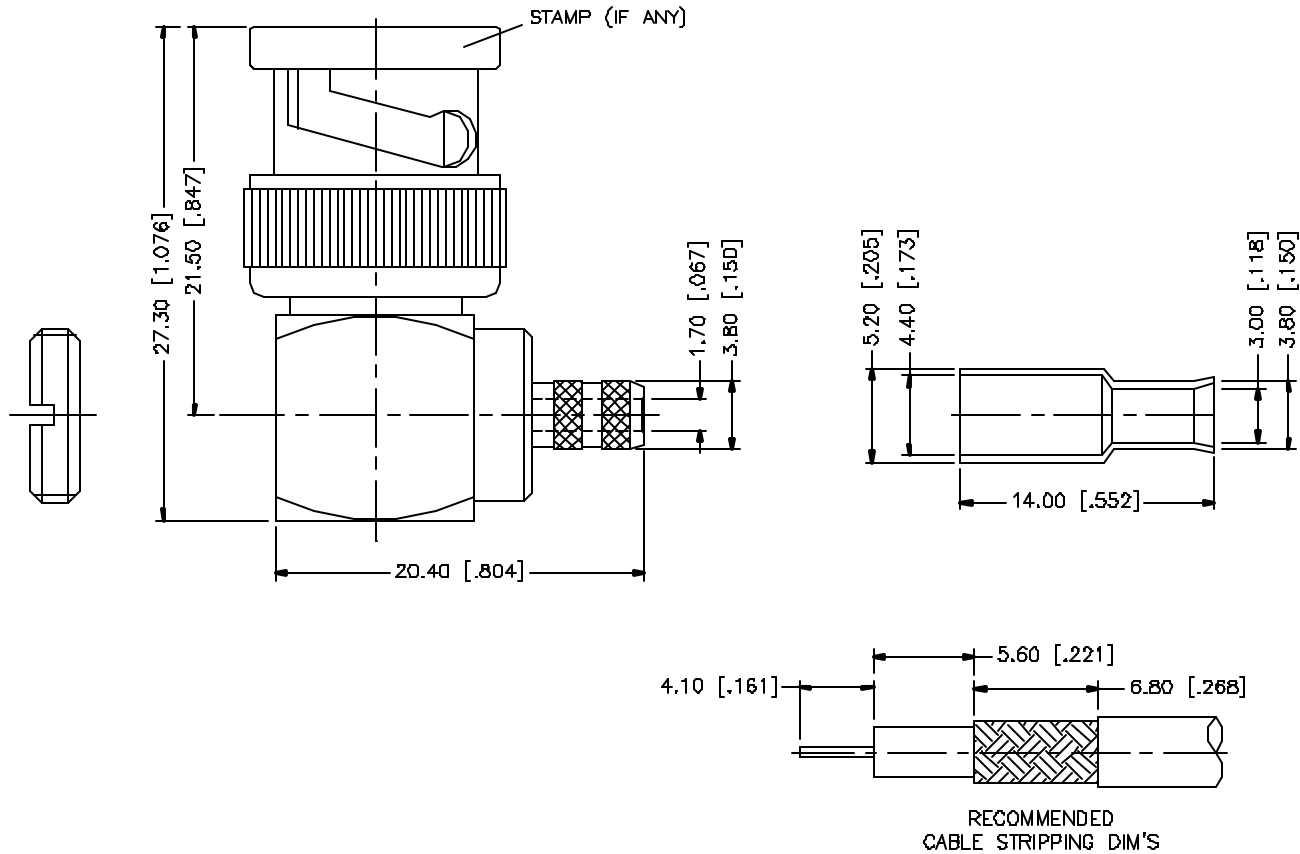

REV.	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex						
8								BNC R/A CRIMP PLUG - 75ohm (FOR RG-179 /U, 187A/U CABLE)						
7							PART DESCRIPTION							
6							PART NO.							
5	NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN	G.R.S.				12/30/04	112179		
4	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CHECKED						DWG. NO. 112179.DWG		
3	CONTACT PIN	BRASS	GOLD	1		ISSUED			REV.	C	SIZE	A	SCALE	NA
2	INSULATOR	DELTRIN	NATURAL	1		SHEET	1 OF 1							
1	SHELL/BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/112/112179.DWG							