


REV.	DATE	DESCRIPTION
A	01/13/99	ADD CRIMP NOTES / CHANGE FERRULE DIMS.
B	05/01/04	UPDATE DRAWING FORMAT

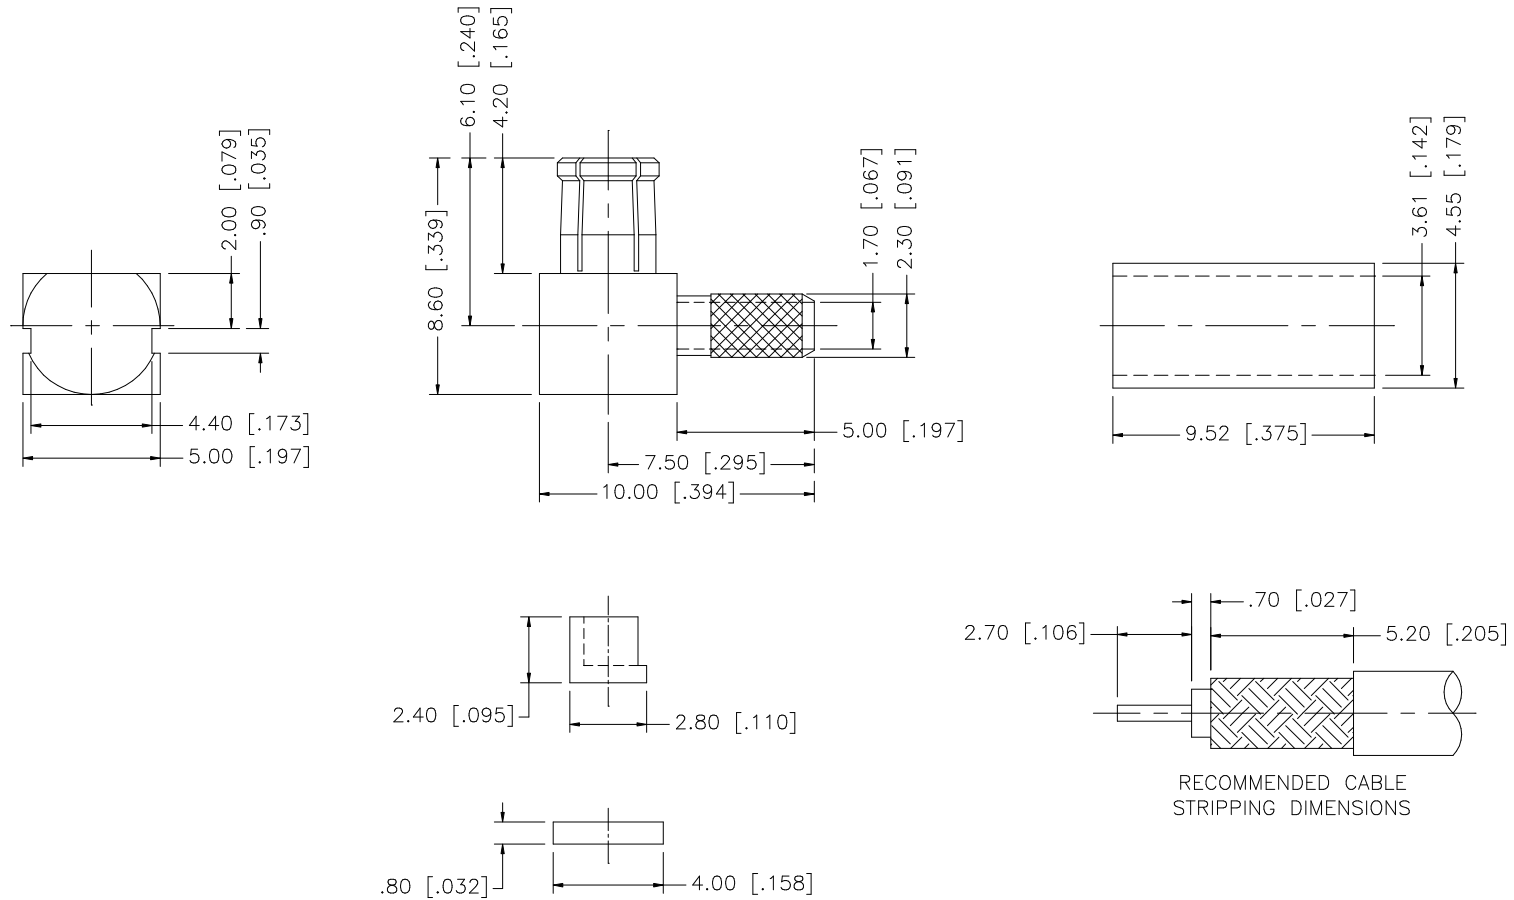

NOTE:

1. CRIMPED FERRULE  
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

					APPROVALS	DATE	<h1 style="color: blue; margin: 0;">Amphenol Connex</h1>												
8					DRAWN	G.R.S.					05/01/04	<b>PART DESCRIPTION</b> MCX R/A CRIMP PLUG (FOR RG-316U/D)							
7					CHECKED			<b>PART NO.</b> 252119											
6	FERRULE	COPPER	GOLD	1	ISSUED							<b>DWG. NO.</b> 252119.DWG							
5	COVER	BRASS	GOLD	1	SHEET	1 OF 1		<b>REV.</b> B											
4	INSULATOR	DELTRIN	NATURAL	1								<b>SIZE</b> A							
3	CONTACT PIN	BRASS	GOLD	1				<b>SCALE</b> NA											
2	INSULATOR	TEFLON	NATURAL	1															
1	BODY	BER. COPPER	GOLD	1															
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:</small> 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:</small> .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"					<b>DO NOT SCALE DRAWING</b>		<b>CAD FILE</b> C:/252/252119.DWG												
<b>DESCRIPTION</b>					<b>MATERIAL</b>					<b>FINISH</b>					<b>QTY</b>				