


REV	DATE	DESCRIPTION
NC	07/23/04	INITIAL RELEASE

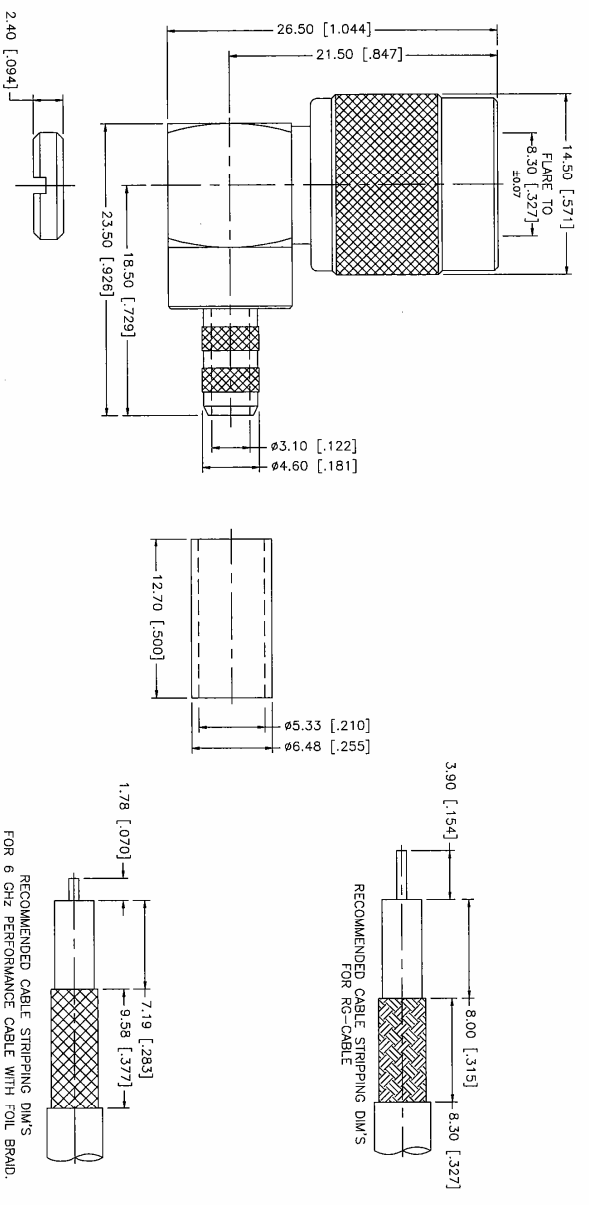

- NOTES:
1. CRIMPED FERRULE HEX SIZE .213"
  2. SOLDER CENTER CONTACT.

RECOMMENDED CABLE STRIPPING DIM'S  
FOR 6 GHz PERFORMANCE CABLE WITH FOIL BRAID.  
ELECTRICAL:

- A) IMPEDANCE: 50ohms
- B) FREQUENCY RANGE: DC-6 GHz
- C) VSWR (RETURN LOSS): 1.4 (13.5dB), MAX.
- D) DIELECTRIC WITHSTANDING VOLTAGE:  
1500 VRMS, MIN.

QTY	FINISH	MATERIAL	DESCRIPTION
1	NICKEL	BRASS	BODY
1	NATURAL	TEFLON	INSULATOR
1	GOLD	PHOS. BRONZE	CONTACT PIN
1	NICKEL	COPPER	FERRULE
1	NICKEL	BRASS	NUT

APPROVALS	DATE
G.R.S.	07/23/04

PART DESCRIPTION	PART NO.	DWG. NO.	REV.	NG	SITE	SCALE
TNC REVERSE POLARITY R/A CRIMP PLUG (FOR RG-58/U, 58C/U CABLE)	122140RP	122140RP DWG			A	NA

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS UNLESS INDICATED OTHERWISE.  
TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 3mm ± 0.20mm  
3 - 120mm ± 0.30mm  
TOLERANCES FOR INCHES ARE:  
.020 - .315 ± 0.007"  
.315 - 1.180 ± 0.015"  
1.180 - 4.724 ± 0.020"

DO NOT SCALE DRAWING

# Amphenol Connex