
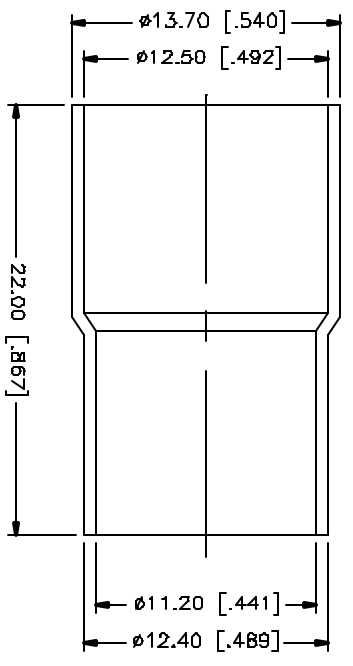
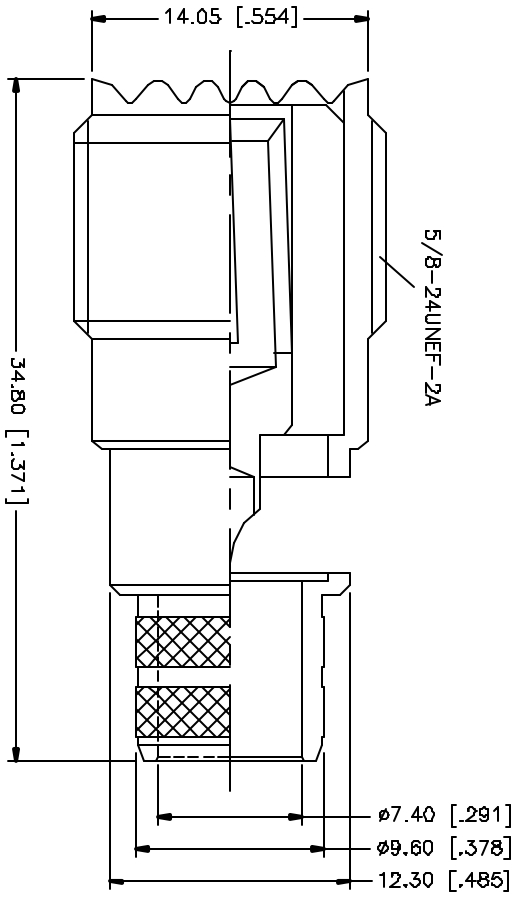


REV.	DATE	DESCRIPTION
NC	01/09/06	INITIAL RELEASE

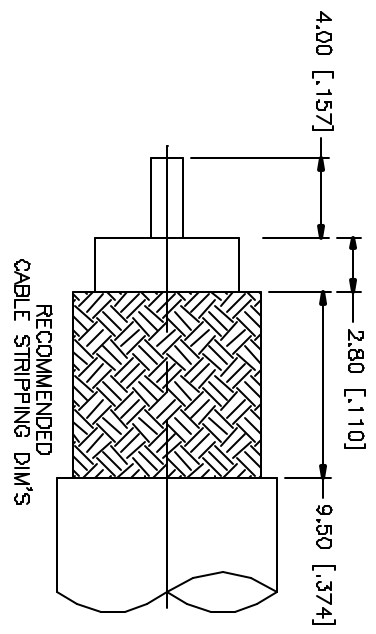

- NOTE:
1. CRIMPED FERRULE  
HEX CRIMP SIZE .429"
  2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	PART DESCRIPTION	DWG. NO.	NO.	NC	SIZE	SCALE
8								<b>Amphenol Connex</b> UHF CRIMP JACK (FOR RG-8/U CABLE) 182335	182335.DWG	NC	NC	A	NA
7													
6													
5													
4	FERRULE	COPPER	NICKEL	1									
3	CONTACT PIN	BRASS	GOLD	1									
2	INSULATOR	DELFIN	NATURAL	1									
1	BODY	BRASS	NICKEL	1									
UHFER DRAWING SPECIFIED DIMENSIONS ARE IN INCHES AND FOR DIMENSIONAL REQUIREMENT ONLY. UHFER DIMENSIONS SPECIFIED ARE: 0.5 - 8mm ± 0.20mm B - 34mm ± 0.40mm 30 - 120mm ± 0.50mm UHFER DIMENSIONS SPECIFIED ARE: 0.20 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"					APPROVALS DRAWN G.R.S. 01/09/05 CHECKED ISSUED SHEET 1 OF 1		PART NO. 182335		DWG. NO. 182335.DWG		NO. NC SIZE A SCALE NA		