NOTES:

1. MATERIALS AND FINISHES:

BODY - BRASS (ASTM-B16 HO2, C36000), NICKEL PLATING CONTACT PIN - PHOSPHOR BRONZE, GOLD PLATING INSULATOR - PTFE PER ASTM D 1710 OR EQUIV.

2. ELECTRICAL:

A. IMPEDANCE:


50 OHM DC - 300 MHz B. FREQUENCY RANGE:


3. MECHANICAL:

A. TEMPERATURE RANGE: -65° C TO +165° C

4. PACKAGING:

A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, APH-BNCP-UHFJ, AND DATE CODE



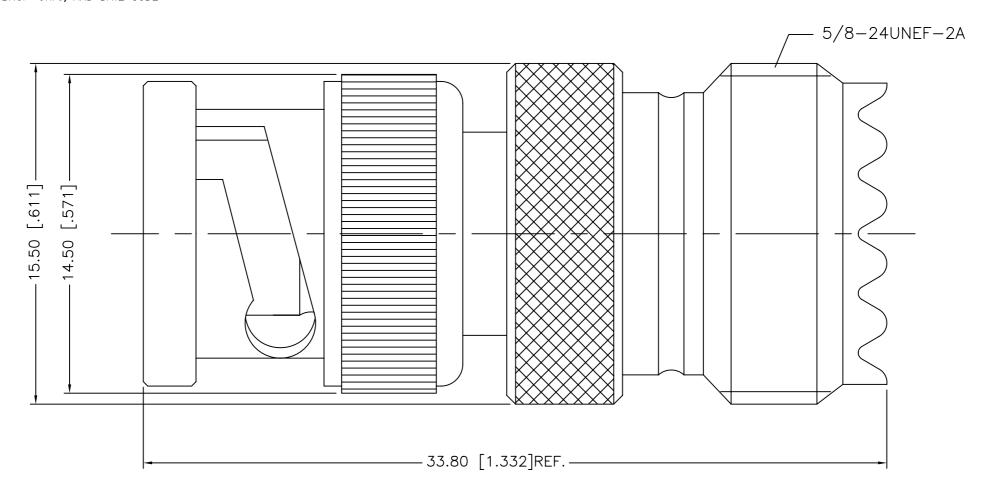

2 PLACE DECIMAL ±.015 (0,381 mm)	,
property of Amphenol Corp. (2) confidential and not to be disclude are given by Amphenol Corp. To ther data by Amphenol Corp., not to be regarded by implication rights or permitting such holder	fications, or other data (1) are, and remain the must be returned upon request; and (3) are osed to any person other than those to whom they he furnishing of these drawings, specifications, or or to any other person to anyone for any purpose is on or otherwise in any manner licensing, granting or any other person to manufacture, use or sell any ented or otherwise, that may in any way be related to specifications, or other data.

MATERIAL	DRAWN	DATE
	C. McGRATH	4/28/05
	ENGINEER	DATE
	O. BARTHELMES	4/28/05
REFERENCE	APPROVED	DATE
EL ENEROL	O. BARTHELMES	9/8/06

H:\DEPT611\ASSY\APH\BNCP-UHFJ

CAD FILE

BNC MALE TO UHF FEMALE **ADAPTER**

Amphenol Corporation RF/Microwave Operations Danbury, Conn. U.S.A. 06810

Α

SCALE: 2:1 SHEET ISSUE DRAWING NO.

DWG SIZE CODE ID В 74868

APH-BNCP-UHFJ