NOTES: I. MATERIALS AND FINISHES: BODY - BeCu, GOLD PLATING, .000030 [0.8] THICK OVER NICKEL CONTACT - BeCu, GOLD PLATING, .000030 [0.8] THICK OVER NICKEL INSULATOR - PTÉE

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 26.5 GHz
C. VSWR(RETURN LOSS): 1.2 (20.8 dB), MAX. DC-10GHz 1.4 (15.6 dB), MAX. 10-18GHz 1.5 (14 dB), MAX. 18-26.5GHz

D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.

3. PHYSICAL:

A. DURABILTIY: 100 CYCLES MIN.
B. ENGAGEMENT FORCE: 15 LB [67 N] MAX
C. DISINGAGEMENT FORCE: 2 LB [9 N] MIN
E. TEMERATURE RANGE: -65° C TO 165° C


4. PACKAGING:

A. QUANTITY: SINGLE PACK
B. MARKING: AMPHENOL, SMP-FSBA-224, DATE CODE

SMP-FSBA-224 REVISIONS DRAWING NO. REV DESCRIPTION DATE ECO APPR THIRD ANGLE PROJ.  $\oplus$   $\Box$  A RELEASE TO MFG 11/22/05 45809 МАН



SCALE 4.000

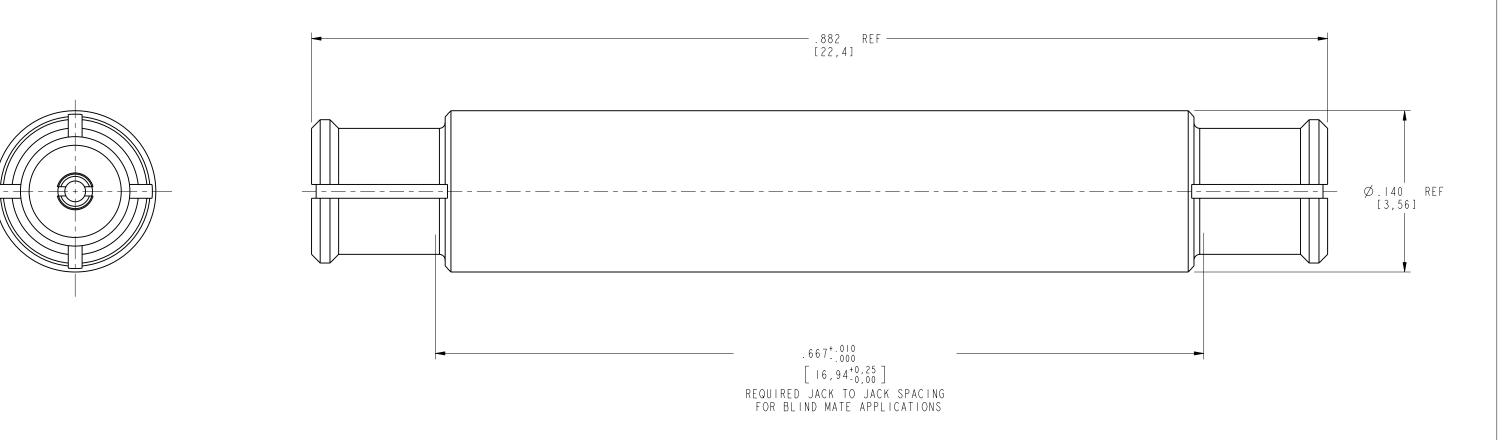

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN M. HOYACK	DATE 27-Sep-01	FEMALE TO FEMALE	Amphenol RF
are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any		ENGINEER	DATE		Tainan, Taiwan
		M. HOYACK	27 - Sep - 0 I		Shenzhen, China
		APPROVED	DATE		www.amphenolrf.com
		B C GLEISSNER	11/22/05		SCALE: 12.0:1 SHEET 2 OF 2
		CAD FILE		CODE ID DWG SIZEDRAWING NO. REV	
product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawinas, specifications, or other data.		I:\SMP\SMP-FSBA-224		74868   B	SMP-FSBA-224 A