


Type N Panel Mount - 4 Hole Flange

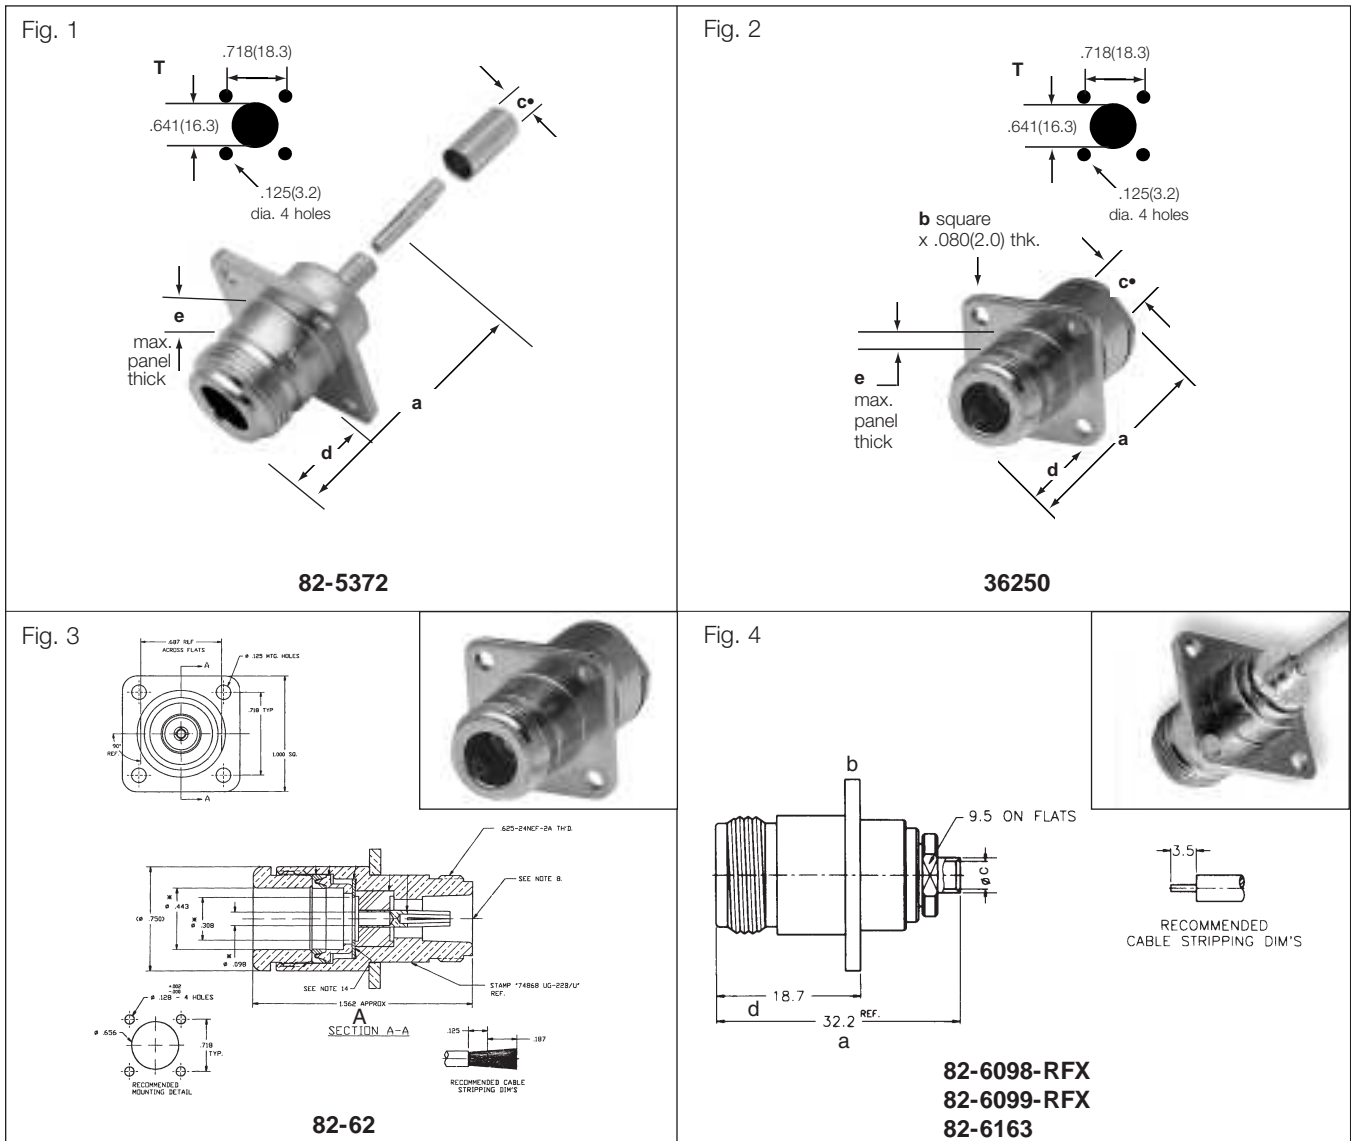

N PANEL JACKS

| Cable RG-/U | Conn. Type | Cable Attachment Outer | Cable Attachment Inner | Dimensions, inches (millimeters) | | | | | Notes | | | Mtg Hole | Military Number | Amphenol Number | Fig |
|-------------------------------------|------------|------------------------|------------------------|----------------------------------|------------|------------|------------|------------|-------|------|------|----------|-----------------|-----------------|-----|
| | | | | a | b | c • | d | e | CAI | Plt. | Ins. | | | | |
| 55, 141, 142 | Panel | Crimp | Crimp | 1.56(39.7) | 1.00(25.4) | .220(5.6) | .576(14.6) | .125(3.2)▼ | C11 | P15 | D1 | T | — | 82-5372 | 2 |
| 55, 58, 141, | Panel | Clamp | Solder | 1.50(38.1) | 1.00(25.4) | .224(5.7) | .656(16.7) | .219(5.6)▼ | C8 | P1 | D1 | T | UG-1095A/U | 36250 | 1 |
| 8, 9, 87A, 144,165,213, 214,216,225 | Panel | Clamp | Solder | 1.56(39.7) | 1.00(25.4) | .440(11.2) | — | — | C8 | P1 | D1 | — | UG-23B/U | 82-62 | 3 |
| 405 (.085) S/R | Panel | Solder | Solder | 1.26(32.2) | 1.00(25.4) | .086(2.2) | .736(18.7) | — | C9 | P7 | D1 | T | — | 82-6098-RFX | 4 |
| 402 (.141) S/R | Panel | Solder | Solder | 1.26(32.2) | 1.00(25.4) | .141(3.6) | .736(18.7) | — | C9 | P7 | D1 | T | — | 82-6099-RFX | 4 |
| 401 (.250) S/R | Panel | Solder | Solder | 1.26(32.2) | 1.00(25.4) | .250(6.35) | .736(18.7) | — | C9 | P7 | D1 | T | — | 82-6163 | 4 |