



NOTES:

1. DO NOT SCALE THIS DRAWING.
2. MATERIAL AND FINISH:
 FEMALE CONTACT: BERYLLIUM COPPER, GOLD PLATED
 BODY: BERYLLIUM COPPER, NICKEL PLATED
 INSULATOR: TFE FLUOROCARBON
 FERRULE: ANNEALED COPPER, NICKEL PLATED
 SLEEVE: BRASS, NICKEL PLATED
3. FOR CRIMPING USE TOOL 227-944, CRIMP DIE 227-1221-37
 CAVITY "B" (.151 HEX).

903-574P-71 S

REVISIONS

DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	OFFICIAL ENG. RELEASE TO MFG.	2/12/99	42844	PB/TA

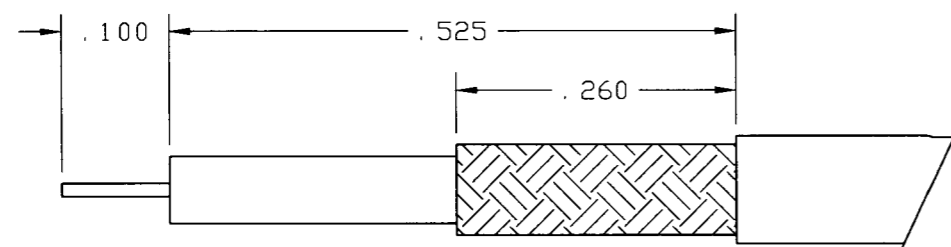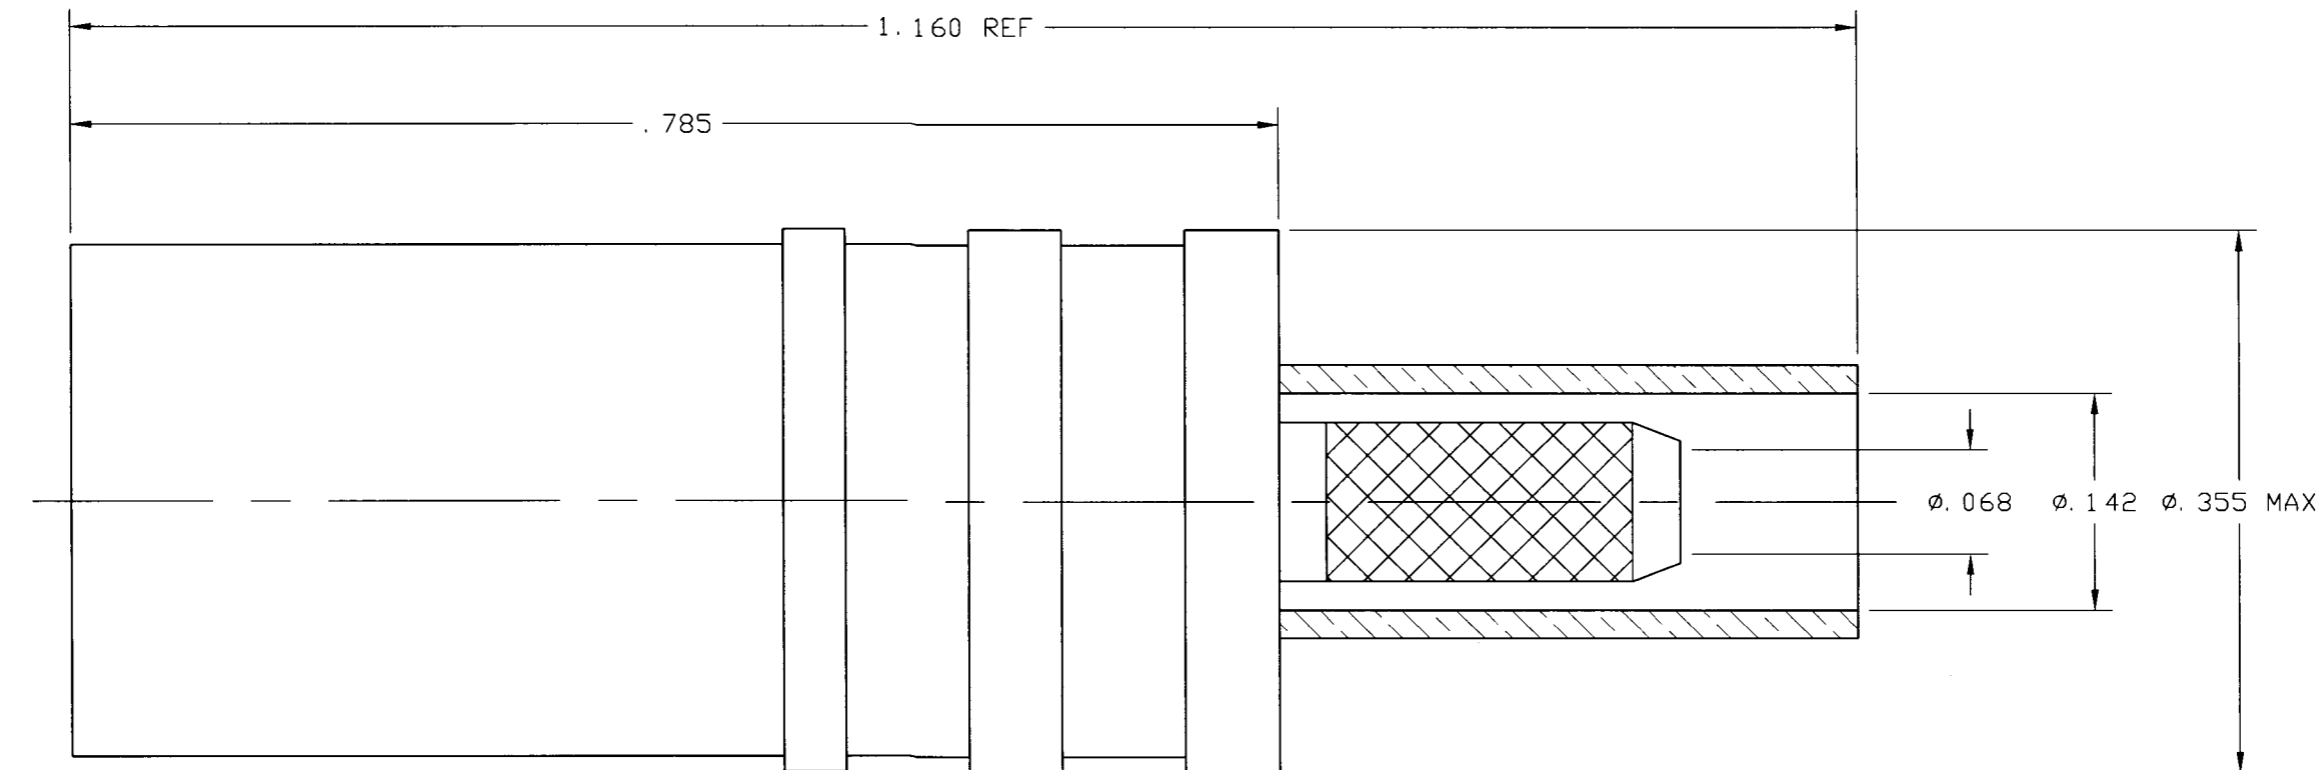

CABLE STRIPPING DIMENSIONS

CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL ±.015 (0,381 mm) 3 PLACE DECIMAL ±.005 (0,127 mm) ANGLES ± 1°	MATERIAL	DRAWN P. BRENZEL 11 FEB 99 ENGINEER P. BRENZEL 11 FEB 99 APPROVED T. AUBIN 11 FEB 99 CAD FILE H:\PETE\SMB\903\ASSY\574P71 SC	DATE 11 FEB 99 DATE 11 FEB 99 DATE 11 FEB 99	TITLE SMB PLUG 75 OHM LOCKING TYPE FOR RD-179	Amphenol Amphenol Corporation RF/Microwave Operations Danbury, Conn. U.S.A. 06810
	REFERENCE EAR 102-966969 3	CODE ID 74868 DWG SIZE B DRAWING NO. 903-574P-71 S	SCALE: 8:1 SHEET 1 OF 1 ISSUE A		