

# PRODUCT SPECIFICATION


<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
8/1/2005	C	9413	UPDATED TEMP DESCRIPTION

**Parent Number:** F18042-

**Description:** 18 Solid BC - AWM  
1015/1230/1011/1335/1032 TEW or AWM I  
A/B

**DIAMETER:** 0.102

**TOLERANCE ±:** 0.003

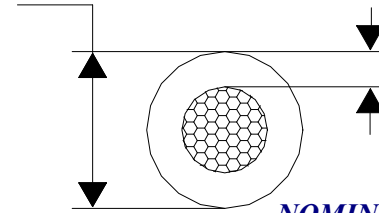

**NOMINAL WALL:** 0.030

**MINIMUM WALL:** 0.027

**Stranding:** 18 SOLID BC

**Style:** UL: AWM 1015/1230/1011/1335 or 1032 CSA: TEW or AWM I  
A/B

**Insulation:** PVC

**Print Legend:** 18 AWG (0.823mm<sup>2</sup>) E96824 (PLANT ID CODE) (AWM LOGO) AWM 1015/1230 105C or 1011 80C or 1335 90C 600V or 1032 90C 1000V VW-1 --- 156016 CSA TEW 105C 600V FT1 or AWM I A/B 105C 600V FT1

**Voltage:** 600V, 1032=1000V

**Temperature:** 1015=105C, 1230: DRY=105C WET=60C, 1011=80C, 1032=90C, 1335: DRY=90C WET=60C

## Notes:

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

**Customer Approval:**

**Customer Part Nbr(s):** \_\_\_\_\_

**Approved By:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Title:** \_\_\_\_\_ **Company Name:** \_\_\_\_\_

**COLEMAN CABLE, INC**

1530 Shields Drive  
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

