




## PRODUCT SPECIFICATION

**CATALOG NUMBER:** See table below  
**DESCRIPTION:** Hi-Vis/Lo-Temp SJTW extension cord with enhanced cold temperature flexibility and a Tri-Source® three outlet cord connector with power indicator light  
**APPROVALS:** UL Listed and CSA Certified, or UL/CUL Listed, Outdoor Use Cord Set

### CONSTRUCTION PARAMETERS:

Conductor: See table below  
 Cable jacket material: Low temperature PVC, blue  
 Overall cable O.D. (nom): See table below  
 Cord rating: Hard Usage per the National Electrical Code  
 Cable legend type: Indent print

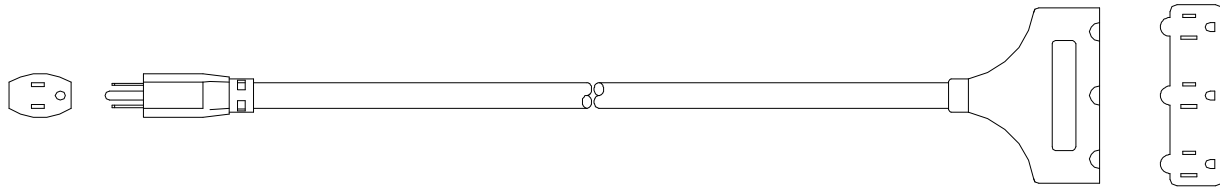

*Note: Plug and cord connector style may vary*

Attachment plug configuration: NEMA 5-15P  
 Cord connector configuration: NEMA 5-15R x 3  
 Plug and connector material: Clear PVC, with neon power indicator lamp in the cord connector

### ELECTRICAL AND ENVIRONMENTAL PROPERTIES:

Cable temperature rating: -50 to +60 °C  
 Nominal operating voltage: 125 VAC  
 Maximum operating current: See table below

Catalog no.	Gauge	Length	Conductor	Cable O.D.	Current rating
03267	14/3	25 ft	41/30 BC	0.352 in	15A
03268		50 ft			
04168	12/3	50 ft	65/30 BC	0.420 in	15A
04169		100 ft			

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.