




# PRODUCT SPECIFICATION

**CATALOG NUMBERS:** See table below  
**DESCRIPTION:** SlenderPlug® triple-tap cord set  
**APPROVALS:** UL Listed General-Use Cord Set

### CONSTRUCTION PARAMETERS:

Cable type: 16/3 SPT-2  
 Conductors: 26/30 bare copper  
 Cable jacket material: PVC  
 Cable jacket color: See table below

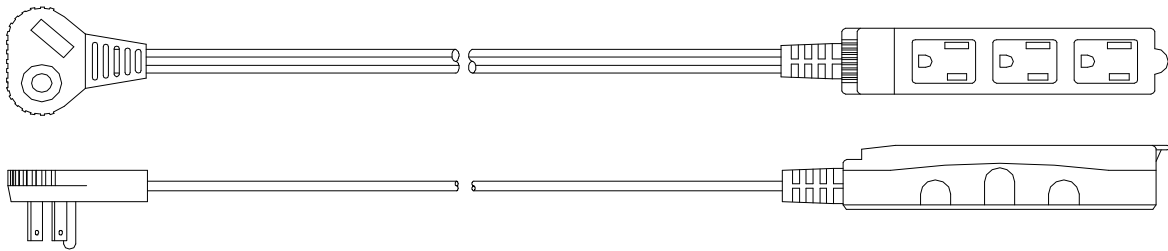

*Note: Plug and connector style may vary*

Cord set length: See table below  
 Attachment plug configuration: NEMA 5-15P, right angle, with offset blades  
 Cord connector configuration: NEMA 5-15R x3  
 Plug and connector material: Molded PVC  
 Plug and connector color: See table below

### ENVIRONMENTAL AND ELECTRICAL PROPERTIES:

Cable temperature rating: -20 to +60 °C  
 Operating voltage (nom): 125V  
 Operating current (max): 13 A  
 Operating wattage (max): 1625 W

### CATALOG NUMBERS:

Catalog no.	Length	Color
03507	6 ft.	Beige
03508	12 ft.	
03517	6 ft.	White
03518	12 ft.	

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.