




PRODUCT SPECIFICATION

Controlled Document - Engineering Drive

CATALOG NUMBERS: See table below
DESCRIPTION: Trinector[®] triple-tap cord set
APPROVALS: UL Listed General-Use Cord Set

CONSTRUCTION PARAMETERS:

Cable type: 16/3 SJTW
Conductors: 26/30 bare copper
Cable jacket material: PVC
Cable jacket color: Orange
Cable O.D. (nom): 0.340"

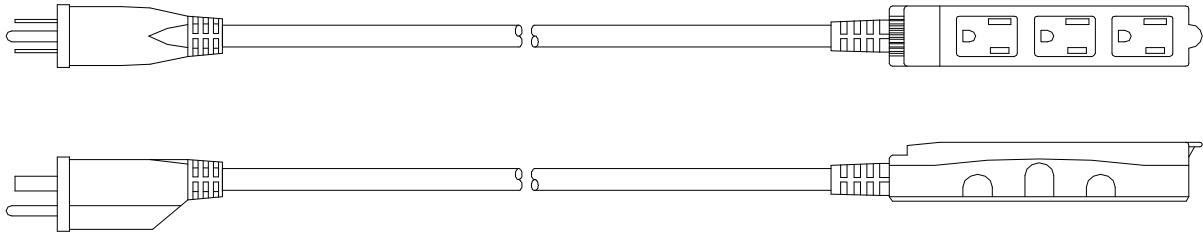

Note: Plug and connector style may vary

Cord set length: See table below
Attachment plug configuration: NEMA 5-15P
Cord connector configuration: NEMA 5-15R x3
Plug and connector material: Molded PVC
Plug and connector color: Orange

ENVIRONMENTAL AND ELECTRICAL PROPERTIES:

Cable temperature rating: -40 to +60 °C
Operating voltage (nom): 125V
Operating current (max): 13 A
Operating wattage (max): 1625 W

CATALOG NUMBERS:

Catalog no.	Length
04003	3 ft.
04006	9 ft.

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Inc. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Inc.

