Miniature Panel Jacks

Glass-Filled Nylon Rated from -29 to 220°C (-20 to 425°F)




MPJ Series

- Compact Size
- ✓ Easy Mount with Spring Clip
- ✓ Accessible Terminal Screws
- Color-Coded
- Accepts OMEGA's as well as all Industry Standard **Miniature Male Connectors**

The MPJ Miniature Panel Jack requires less than half of the panel area required by the standard size version. A simple push-on clip is all that is required to retain the connector in a rectangular cutout, or the optional MSS snap strip can be used to mount a row. Angled terminal screws allow wiring to be done after panel assembly.

- 8.1 x 16.7 mm (0.32 x 0.66") **Cutout Required**
- 14.3 mm (0.56") Centers Horizontally
- 23.8 mm (0.94") Centers Row to Row Minimum

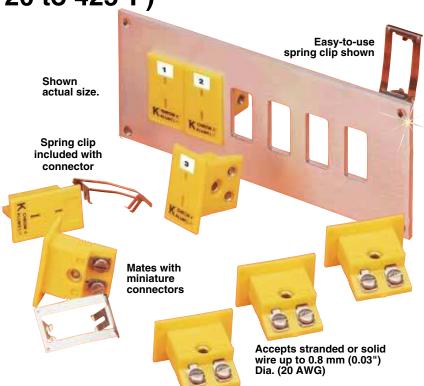

Please visit newportUS.com/panelpunches for panel punches



Extra supply of dust caps, MPJ-CAP-12 available.



We make running changes when technical advances allow. Check at time of ordering for additional features.

Extra Mounting Clips Available

Model MH-MPJ-1. (each) Model MH-MPJ-5. (5-pack)

Extra ID Number Labels:

Model **1-6S**, for 1 thru 6 Model **1-12S**, for 1 thru 12 Model 1-18S, for 1 thru 18

Model 1-24S, for 1 thru 24 Model 1-50S, for 1 thru 50

Model 1-100S, for 1 thru 100

Disco	unt S	chedule
-------	-------	---------

1-10	Net			
11-49	5%			
50-99	10%			
100-999	15%			
1000-4999	20%			
5000 and over	25%			

To Order Visit newportUS.com/mpj for Pricing and Details							
Alloy	Type of Thermocouple Used	Compensating Alloy Used in Connector		Shell	Model Number		
Code	With Connector	+	-	Color	(Female)		
K	CHROMEGA®-ALOMEGA®	CHROMEGA®	ALOMEGA®	Yellow	MPJ-K-F		
T	Copper-Constantan	Copper	Constantan	Blue	MPJ-T-F		
J	Iron-Constantan	Iron	Constantan	Black	MPJ-J-F		
E	CHROMEGA®-Constantan	CHROMEGA®	Constantan	Purple	MPJ-E-F		
R/S	Pt-Pt/13%Rh	Copper	RNX/SHX	Green	MPJ-R/S-F		
G	W-W/26%Re	GPX	GNX	Red	MPJ-G-F		
C	W/5%Re-W/26%Re	CPX	CNX	Red	MPJ-C-F		
D	W/3%Re-W/25%Re	DPX	DNX	Red	MPJ-D-F		
U	Uncompensated	Copper	Copper	White	MPJ-U-F		
N	OMEGALLOY®	OMEGA-P®	OMEGA-N®	Orange	MPJ-N-F		

Connectors come with mounting hardware (spring clip). Connectors in panels come with ID number labels.

Note: Type U (Uncompensated) connectors are used with Type B thermocouples (Platinum/6% Rhodium-Platinum/30% Rhodium).

† K, T, J, E, R, S, and B are ANSI designations.

Ordering Example: MPJ-K-F, Miniature panel jack for use with Type K female connector.