Standard Panel Jacks

Color-Coded; Glass-Filled Nylon Rated to 220°C (425°F)





JP Series




- ✓ Easy Installation
- ✓ Flexibility
- ✓ ID Labels Included for Identification
- Decorative-Enhances Any Instrument
- ✓ Combination Phillips/ Slot Screws
- Alloys of the Inserts Match ANSI Thermocouple Grade Calibrations

Panel jacks contain two female, collet-type, spring-loaded connectors that will accept any standard male thermocouple connector. The panel jacks are molded of high-impact, glass-filled nylon and are numbered and labeled as well as color-coded.






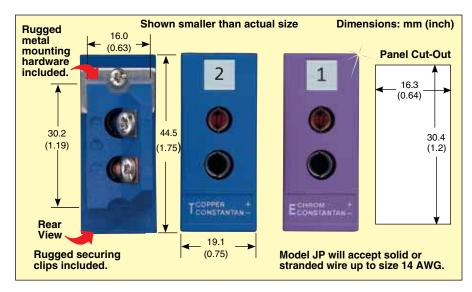

Panel Mounting Adaptor Plates

...for mounting a single panel jack in a round knock-out hole

Model No. RJACL



Mounting plate used with type JP decorator styled, color-coded panel jacks adapts them for mounting as single-circuit jack in control panel or instrument case. Simplifies mounting, and holds the connector in place tightly. Covers 33.3 mm (1.31") diameter knock-out hole. All adaptor plates are made of 0.76 mm (0.030") nickel-plated steel. Price includes all screws and mounting hardware.

We make running changes when technical advances allow. Check at time of ordering for additional features.

Discount Schedule				
11-49		5%		
50-99		10%		
100-999)	15%		
1000-49	999	20%		
5000 an	nd over	25%		

Extra Mounting Clips Available.

Model MH-JP-1

Model MH-JP-5 Extra ID Number Labels: Model 1-6L, 1 thru 6 Model 1-12L, 1 thru 12 Model 1-18L, 1 thru 18

Model **1-24L**, 1 thru 24 Model **1-50L**, 1 thru 50 Model **1-100L**, 1 thru 100

10 Urder visit newportUS.com/jp for Pricing and Details							
Alloy	Type of Thermocouple Used	Compensating Alloy Used in Connector		Shell	Model Number		
Code [†]	With Connector	+	-	Color	(Female)		
K	CHROMEGA®-ALOMEGA®	CHROMEGA®	ALOMEGA®	Yellow	JP-K-F		
LT	Copper-Constantan	Copper	Constantan	Blue	JP-T-F		
J	Iron-Constantan	Iron	Constantan	Black	JP-J-F		
E	CHROMEGA®-Constantan	CHROMEGA®	Constantan	Purple	JP-E-F		
R/S	Pt-Pt/13%Rh	Copper	Alloy #11	Green	JP-R/S-F		
Ğ	W-W/26%Re	200	226	Red	JP-G-F		
C	W/5%Re-W/26%Re	CPX	CNX	Red	JP-C-F		
D	W/3%Re-W/25%Re	203	225	Red	JP-D-F		
U	Uncompensated	Copper	Copper	White	JP-U-F		

Comes complete with rugged securing clips, metal mounting hardware, ID labels and dust cap. † K. T. J. E. R. S and B are ANSI designations.

Note: Type U (uncompensated) connectors are used with Type B thermocouples (Platinum/6% Rhodium-Platinum/30% Rhodium).

Ordering Example: JP-K-F, panel jack per use with Type K female connector.