



REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
B		PROPOSAL	MAY 12,05	L.CHAN
C		CHNGAE 11.81 TO 11.43 PER ACTUAL PART	OCT29/12	L.CHAN

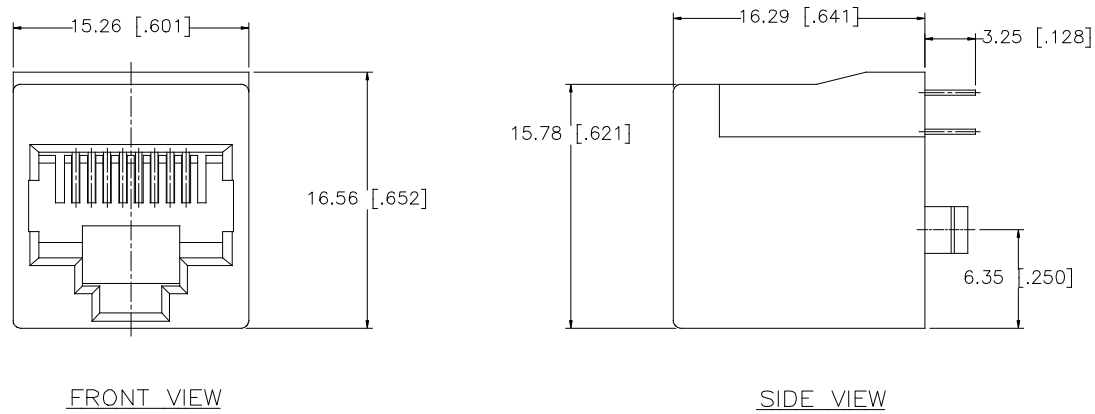

- MATERIALS:**
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0
 COLOR: BLACK

 CONTACTS: PHOSPHOR BRONZE
 PLATING: REFER TO PART NUMBER FOR GOLD THICKNESS ON MATING SURFACES.
 50 μ" [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ" [2.54 MICRONS]
 MIN. MATTE TIN OR GOLD FLASH ON CONTACT TAILS.

- MECHANICAL:**
 MATING FORCE: 5.0 LBS MAX.
- ELECTRICAL:**
 CONTACT RESISTANCE: 40 MILLIOHMS MAXIMUM
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM
 CURRENT RATING: 1.5 AMPS
 VOLTAGE RATING: 125 VOLTS AC
- ENVIRONMENTAL:**
 STORAGE TEMPERATURE: -20°C to 85°C
 PACKAGING METHOD: TRAY PACKAGING

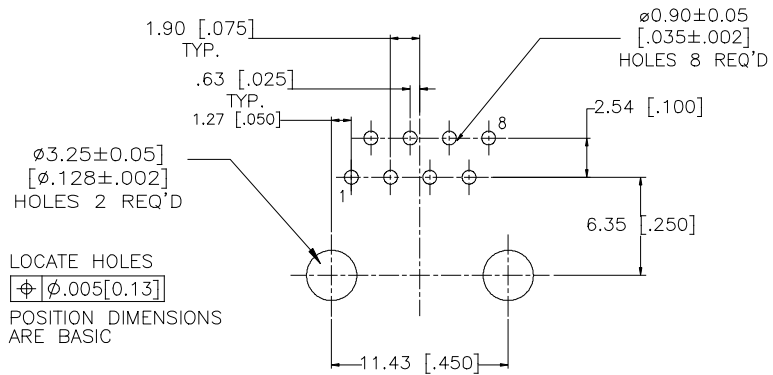

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

PART NUMBER: RJE08-188-0X10

- GOLD PLATING:**
- 1 = 6 μ"
 - 2 = 15 μ"
 - 3 = 30 μ"
 - 4 = 50 μ"

DRAWN PAULW	DATE 05/12/05	Amphenol Canada Corp.			
DESIGNED					
CHECKED CHIGOW	DATE 05/12/05	TITLE			
I. E. APPRD.		MODULAR JACK, TOP ENTRY, 8 POSITION, 8 CONTACTS, WITHOUT FLANGE, UNSHIELDED, - RoHS COMPLIANT			
Q. A. APPRD.					
DWG. APPRD.					
ENG. REL. NO.					DWG
REF.			P-RJE08-188-0X10	C	
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554	SCALE	WT. -----	SURF. -----	SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.