




2.54mm Pin Header Right Angle Type

MATERIAL







Insulator : High Temperature Polyester
Contact Pin : Brass

SPECIFICATION




Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Operation Temperature : -40°C to + 105°C

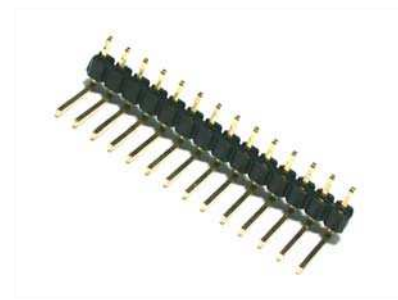

Detail Dimensions

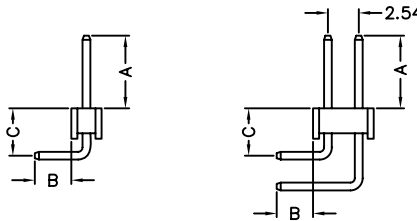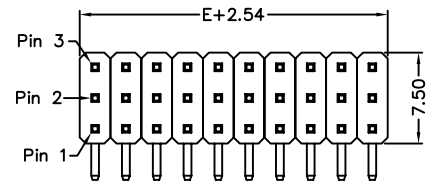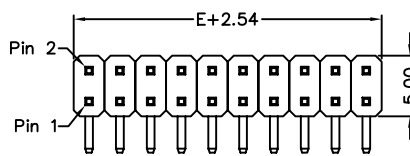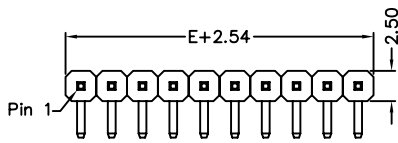

Recommended P.C.B Layout

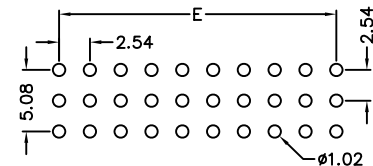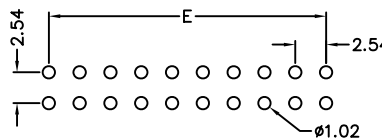

Order Information

211-x x - xx G B xx
1 2 3 4 5

| Standard Parts | DIM A | DIM B | DIM C |
|----------------|-------|-------|-------|
| 211-xx-xxGB01 | 6.00 | 3.00 | 3.90 |

- 7: Green Product
9: Green Product High Temp
- 1: Single row Plastic Height=2.5mm
2: Dual rows Plastic Height=2.5mm
3: Triple rows Plastic Height=2.5mm
A: Single row Plastic Height=1.5mm
B: Dual rows Plastic Height=1.5mm
- No. of contacts per row
- G: Gold Flash
S: Selective Gold Plating
T: Tin Plating
- Pinrex internal code

If you need other dimensions, please fill out DIM A/B/C and contact our sales representatives.

| DIM A | DIM B | DIM C |
|-------|-------|-------|
| | | |

Number Of Contacts

Unit: mm

| Poles | DIM E | Poles | DIM E | Poles | DIM E | Poles | DIM E | Poles | DIM E | Poles | DIM E | Note |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | 8 | 17.78 | 15 | 35.56 | 22 | 53.34 | 29 | 71.12 | 36 | 88.90 | 1) Single Row is available up to 1x50 ways, please contact us for information! |
| 2 | 2.54 | 9 | 20.32 | 16 | 38.10 | 23 | 55.88 | 30 | 73.66 | 37 | 91.44 | |
| 3 | 5.08 | 10 | 22.86 | 17 | 40.64 | 24 | 58.42 | 31 | 76.20 | 38 | 93.98 | |
| 4 | 7.62 | 11 | 25.40 | 18 | 43.18 | 25 | 60.96 | 32 | 78.74 | 39 | 96.52 | 2) Plastic in Red, Yellow, Green, Blue, Pink, Purple and other colors are available, please provide Pantone color code and contact us for information! |
| 5 | 10.16 | 12 | 27.94 | 19 | 45.72 | 26 | 63.50 | 33 | 81.28 | 40 | 99.06 | |
| 6 | 12.70 | 13 | 30.48 | 20 | 48.26 | 27 | 66.04 | 34 | 83.82 | | | |
| 7 | 15.24 | 14 | 33.02 | 21 | 50.80 | 28 | 68.58 | 35 | 86.36 | | | |