



0.3mm FPC Socket ZIF Type

MATERIAL





Insulator : High Temperature Polyester
Contact Pin : Phosphor Bronze

SPECIFICATION



Current Rate : 0.2 AMP
Insulation Resistance : 1000MΩMin.
Contact Resistance : 10mΩMax.
Operation Temperature : -55°C to +105°C



Detail Dimensions

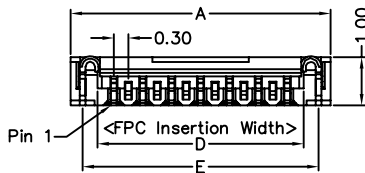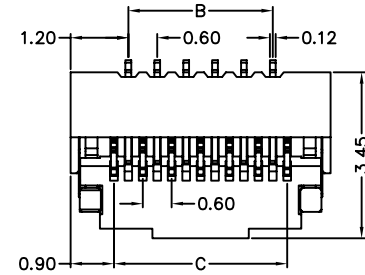

Recommended P.C.B Layout

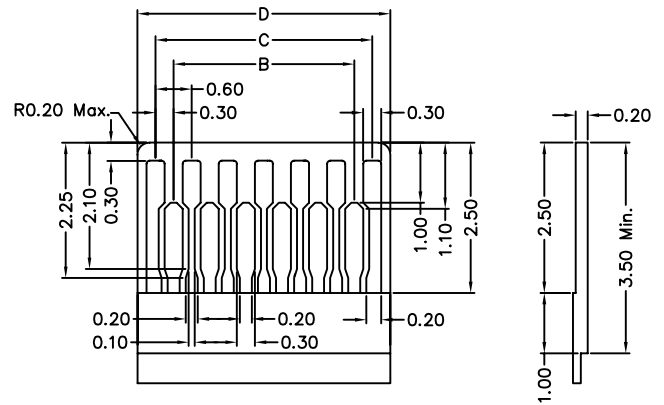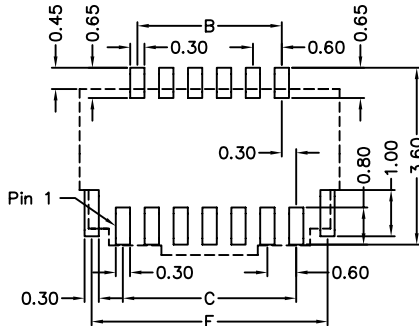

<FPC spec. for reference>

Order Information

979-63- 5 xx 030
1 2 3

| Standard Parts |
|----------------|
| 979-63-535030 |
| 979-63-539030 |

- 3: Reel package
- No. of contacts (13~71)
- Gold Plating 3u"

Number Of Contacts

Unit: mm

| Poles | DIM A | DIM B | DIM C | DIM D | DIM E | Poles | DIM A | DIM B | DIM C | DIM D | DIM E | Poles | DIM A | DIM B | DIM C | DIM D | DIM E |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----------------------------------|-------|-------|-------|-------|-------|
| 13 | 5.40 | 3.00 | 3.60 | 4.23 | 4.90 | 27 | 9.60 | 7.20 | 7.80 | 8.43 | 9.10 | * 41 | 13.80 | 11.40 | 12.00 | 12.63 | 13.30 |
| 15 | 6.00 | 3.60 | 4.20 | 4.83 | 5.50 | 29 | 10.20 | 7.80 | 8.40 | 9.03 | 9.70 | * 45 | 15.00 | 12.60 | 13.20 | 13.83 | 14.50 |
| 17 | 6.60 | 4.20 | 4.80 | 5.43 | 6.10 | 31 | 10.80 | 8.40 | 9.00 | 9.63 | 10.30 | 49 | 16.20 | 13.80 | 14.40 | 15.03 | 15.70 |
| 19 | 7.20 | 4.80 | 5.40 | 6.03 | 6.70 | * 33 | 11.40 | 9.00 | 9.60 | 10.23 | 10.90 | 51 | 16.80 | 14.40 | 15.00 | 15.63 | 16.30 |
| * 21 | 7.80 | 5.40 | 6.00 | 6.63 | 7.30 | * 35 | 12.00 | 9.60 | 10.20 | 10.83 | 11.50 | 57 | 18.60 | 16.20 | 16.80 | 17.43 | 18.10 |
| 23 | 8.40 | 6.00 | 6.60 | 7.23 | 7.90 | 37 | 12.60 | 10.20 | 10.80 | 11.43 | 12.10 | 71 | 22.80 | 20.40 | 21.00 | 21.63 | 22.30 |
| 25 | 9.00 | 6.60 | 7.20 | 7.83 | 8.50 | * 39 | 13.20 | 10.80 | 11.40 | 12.03 | 12.70 | * 21P,33P,35P,39P,41P,45P in MP. | | | | | |