



Flexible Flat Cable

0.5/0.8/1.0/1.25/2.54

MATERIAL



Insulator : Polyester
 Conductor : Tin plated Copper
 UL No. : UL 20624 80°C 60V
 UL 20706 105°C 60V



SPECIFICATION

Insulation Resistance : 100MΩ Min.
 Conductor Resistance : 180mΩ Max.

Detail Dimensions

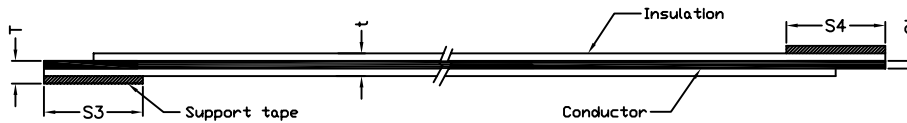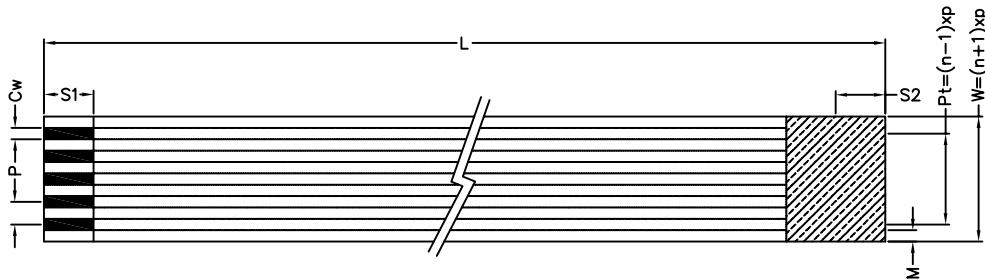

A		C	
B		D	

Order Information

Unit: mm

991-x0 - xx xx x x
 1 2 3 4 5

P	0.5	0.8	1.0	1.25	2.54
Cw	0.3	0.5	0.65	0.8	1.27
Ct	0.035	0.05	0.05	0.1	0.1
T	0.3	0.3	0.3	0.3	0.3
t	0.155	0.17	0.17	0.22	0.22

- 1. 9: Pitch 2.54mm
- 4: Pitch 1.25mm
- 7: Pitch 1.0mm
- 8: Pitch 0.8mm
- 6: Pitch 0.5mm
- 2. No. of conductors
- 3. Spec. code
- 4. A: Type A
- B: Type B
- C: Type C
- D: Type D
- 5. Pinrex internal code

*** Pleaes provide details as below example while send us the inquiry, thanks for your cooperation!

Number	Type	P	Pt	W	M	Cw	Ct	S1	S2	S3	S4	L
20	A	0.5	9.5	10.5	0.35	0.3	0.035	4.0	4.0	8.0	8.0	150