



1.0mm Wire to Board Header Single row SMT Type

MATERIAL

Insulator : High Temperature Polyester
Contact Pin : Phosphor Bronze


SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 100MΩ MIN.
Contact Resistance : 20mΩMax.
Operation Temperature : -25°C to +85°C




Detail Dimensions



710-73-xxTW01

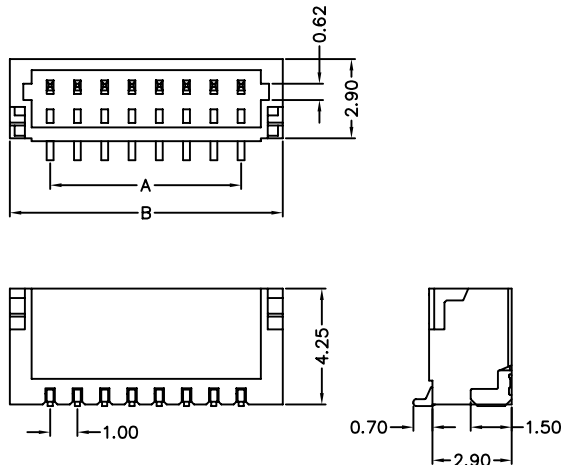

710-74-xxTW01

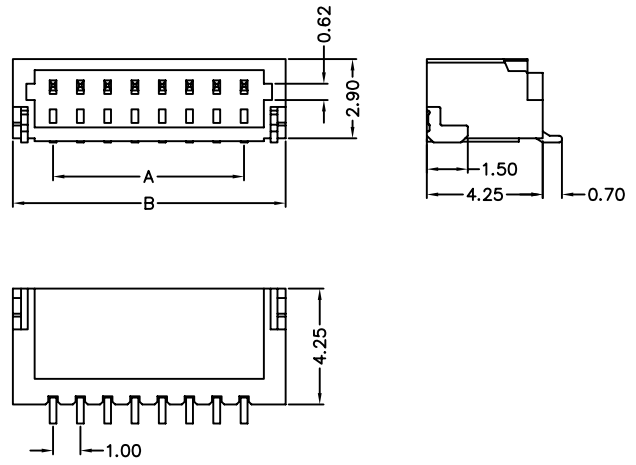

Recommended P.C.B Layout

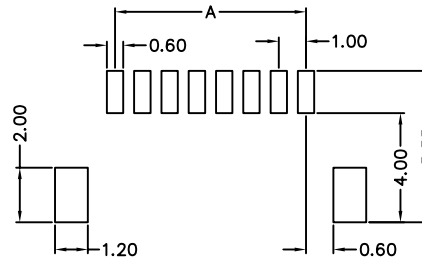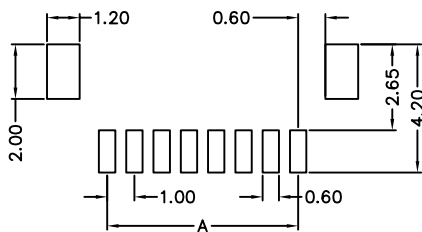

Order Information

710-7 x - xx T W xx
1 2 3 4 5

1. 3: SMT Straight Type
4: SMT Right Angle Type
2. No. of contacts
3. G: Gold Flash
T: Tin Plating
4. W: White Insulator
5. Pinrex internal code

Standard Parts	Type
710-73-xxTW01	SMT Straight
710-74-xxTW01	SMT R/A

Number Of Contacts

Unit: mm

Poles	DIM A	DIM B	Poles	DIM A	DIM B	Poles	DIM A	DIM B
2	1.00	4.00	9	8.00	11.00	20	19.00	22.00
3	2.00	5.00	10	9.00	12.00			
4	3.00	6.00	11	10.00	13.00			
5	4.00	7.00	12	11.00	14.00			
6	5.00	8.00	13	12.00	15.00			
7	6.00	9.00	14	13.00	16.00			
8	7.00	10.00	15	14.00	17.00			