



# 2.5mm Wire to Board Header Straight (R/A) Type

## MATERIAL

Insulator : Polyester  
Contact Pin : Brass


## SPECIFICATION

Current Rate : 2 AMP  
Insulation Resistance : 1000MΩ MIN.  
Contact Resistance : 20mΩMax.  
Operation Temperature : -25°C to +85°C




## Detail Dimensions

752-71-xxTW01

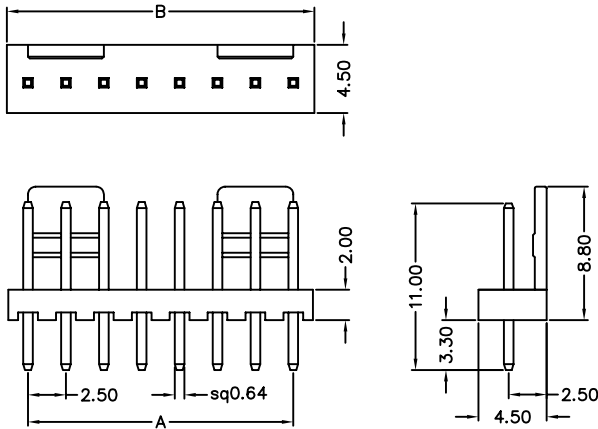

752-72-xxTW01

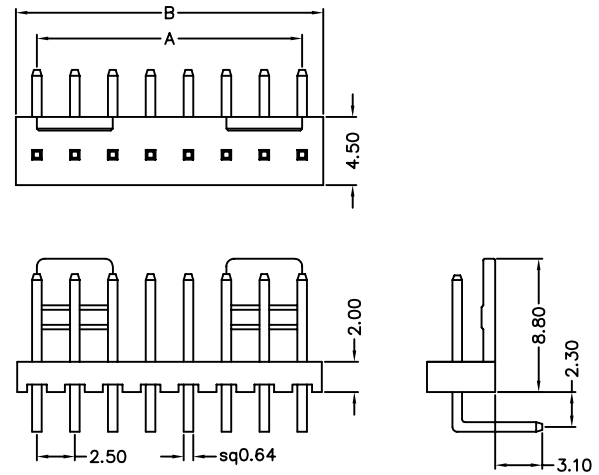


## Recommended P.C.B Layout



## Order Information

752-7 x - xx T W xx  
1 2 3 4 5

1. 1: Straight Type
2. 2: Right Angle Type
2. No. of contacts
3. T: Tin Plating
4. W: White Insulator
5. Pinrex internal code



Standard Parts	Type
752-71-xxTW01	Straight
752-72-xxTW01	Right Angle

## Number Of Contacts

Unit: mm

Poles	DIM A	DIM B	Poles	DIM A	DIM B	Poles	DIM A	DIM B						
2	2.50	5.10	9	20.00	22.60	16	37.50	40.10						
3	5.00	7.60	10	22.50	25.10	17	40.00	42.60						
4	7.50	10.10	11	25.00	27.60	18	42.50	45.10						
5	10.00	12.60	12	27.50	30.10	19	45.00	47.60						
6	12.50	15.10	13	30.00	32.60	20	47.50	50.10						
7	15.00	17.60	14	32.50	35.10									
8	17.50	20.10	15	35.00	37.60									