



3.96mm Wire to Board Header Straight (R/A) Type

MATERIAL

Insulator : Polyester
Contact Pin : Brass




SPECIFICATION

Current Rate : 7 AMP
Insulation Resistance : 1000MΩ MIN.
Contact Resistance : 20mΩMax.
Operation Temperature : -25°C to +85°C






Detail Dimensions



732-71-xxTW01

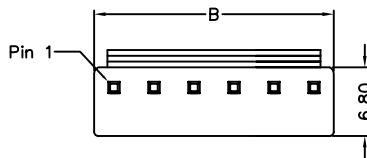

732-72-xxTW01

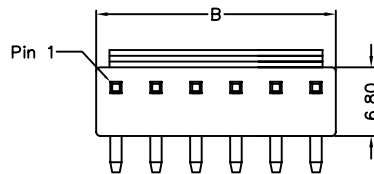

Recommended P.C.B Layout



Order Information

732-7 x - xx T W xx
1 2 3 4 5

Standard Parts	Type
732-71-xxTW01	Straight
732-72-xxTW01	Right Angle

- 1: Straight Type
2: Right Angle Type
2. No. of contacts
3. T: Tin Plating
4. W: White Insulator
5. Pinrex internal code

Number Of Contacts

Unit: mm

Poles	DIM A	DIM B	Poles	DIM A	DIM B									
2	3.96	7.68	9	31.68	35.58									
3	7.92	11.82	10	35.64	39.54									
4	11.88	15.78	11	39.60	43.50									
5	15.84	19.71	12	43.56	47.46									
6	19.80	23.70	13	47.52	51.42									
7	23.76	27.66	14	51.48	55.38									
8	27.72	31.62	15	55.44	59.34									