




4.0mm Wire to Board LCD Connector DIP Type

MATERIAL


Insulator : Polyester
Contact Pin : Phosphor Bronze

SPECIFICATION


Current Rate : 1 AMP
Insulation Resistance : 500MΩ MIN.
Contact Resistance : 20mΩMax.
Operation Temperature : -25°C to +85°C

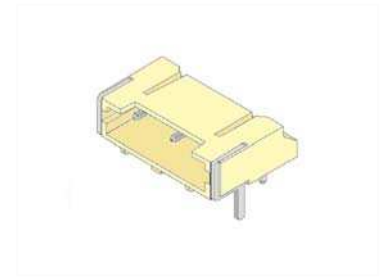

Detail Dimensions

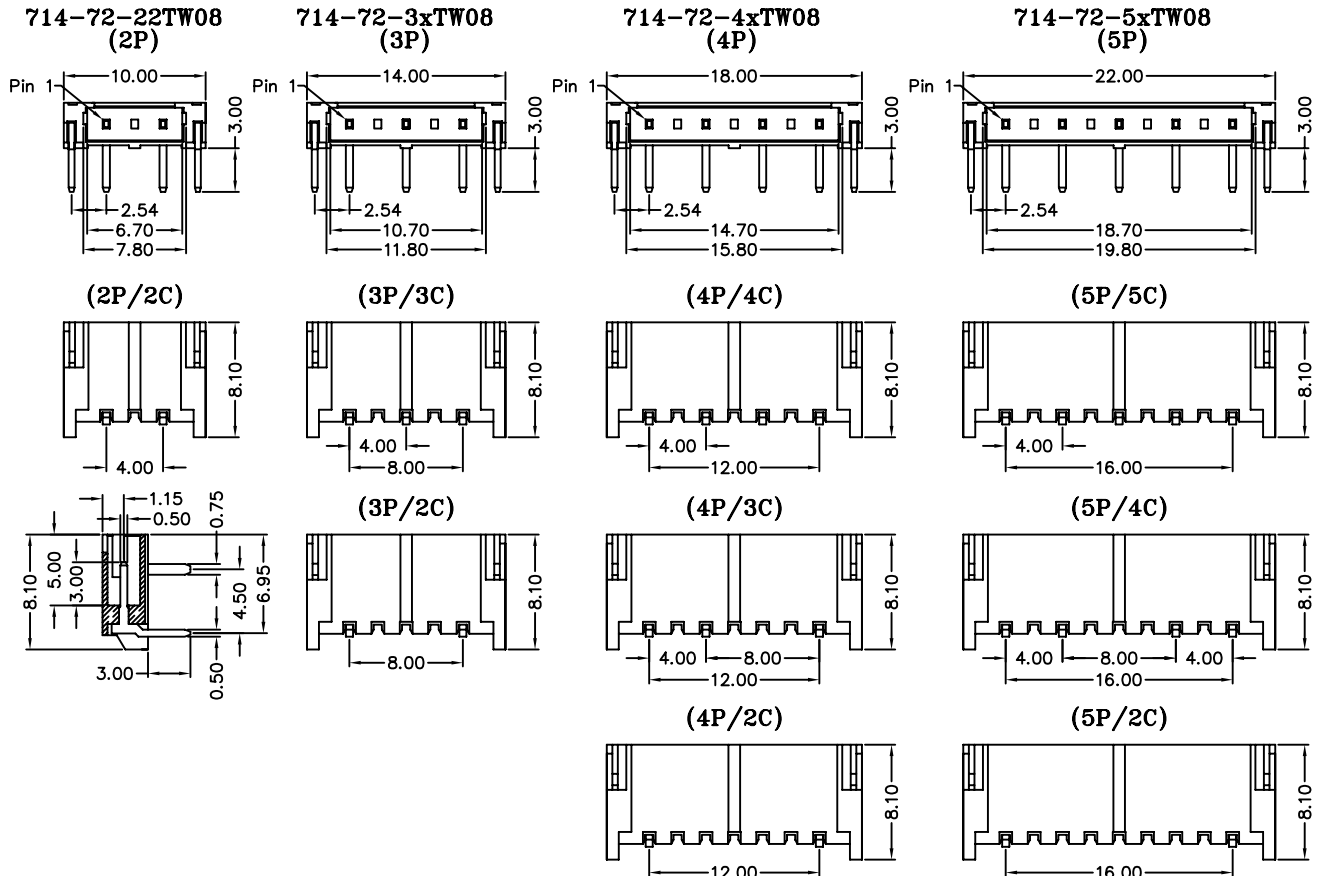

Recommended P.C.B Layout

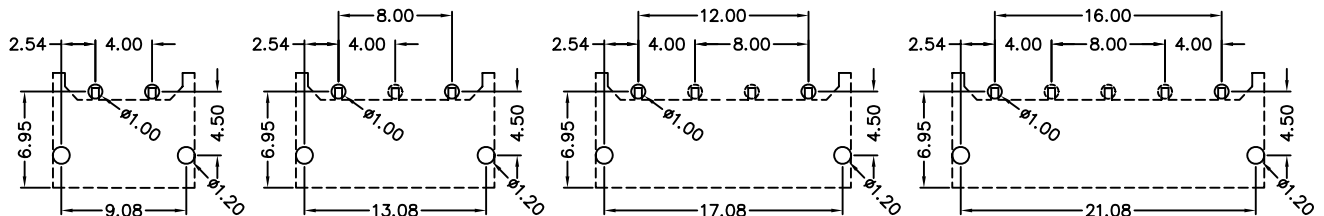

Order Information

714-72 - x x T W 08
1 2 3 4 5

- No. of poles
- No. of contacts
- T: Tin Plating
- W: White Insulator
- Pinrex internal code

Standard Parts	Type
714-72-22TW08	2P/2C
714-72-33TW08	3P/3C
714-72-32TW08	3P/2C
714-72-44TW08	4P/4C
714-72-43TW08	4P/3C
714-72-42TW08	4P/2C
714-72-55TW08	5P/5C
714-72-54TW08	5P/4C
714-72-52TW08	5P/2C

Unit: mm