



4.2mm Power Connector Straight Type

MATERIAL


Insulator : Polyester
Contact Pin : Brass

SPECIFICATION


Current Rate : 9 AMP
Insulation Resistance : 1000MΩ MIN.
Contact Resistance : 30mΩMax.
Operation Temperature : -25°C to +85°C

Detail Dimensions



740-71-xxTx03

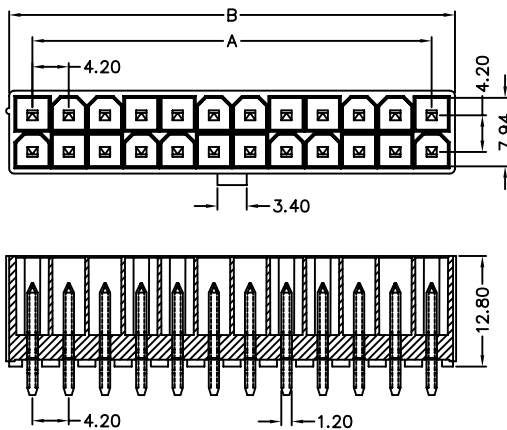

740-71-xxTx13

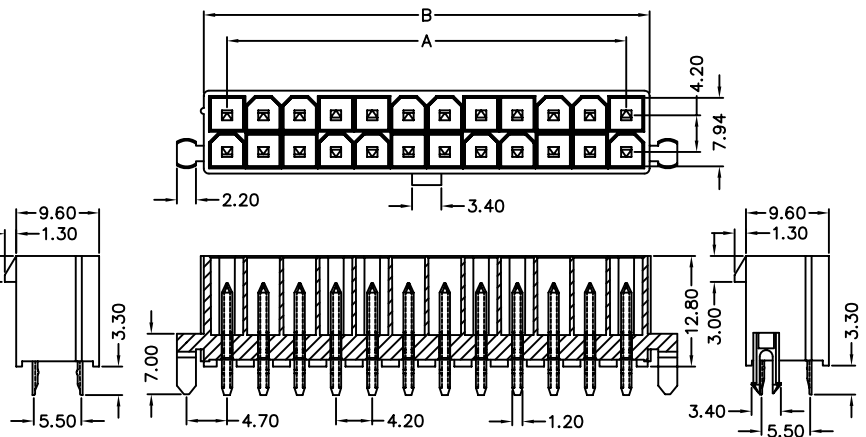


Recommended P.C.B Layout

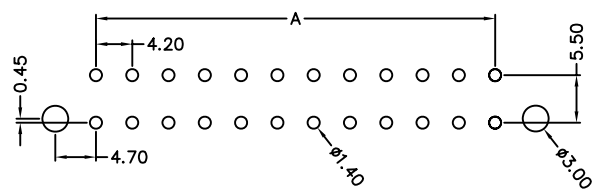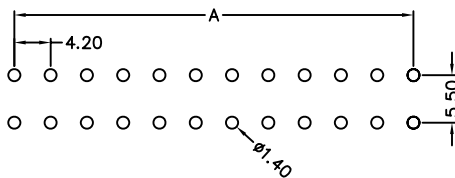

Order Information

740- 71 - xx T x x x
1 2 3 4 5

1. No. of contacts
2. T: Tin Plating
3. S: Crystal Insulator
W: White Insulator
4. 0: without Posts
1: with Posts
5. Pinrex internal code

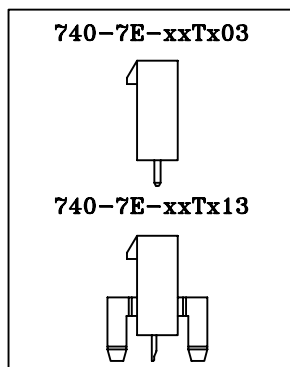

Standard Parts	Type
740-71-xxTx03	w/o posts
740-71-xxTx13	with posts

Number Of Contacts

Unit: mm

Poles	DIM A	DIM B	Poles	DIM A	DIM B	Note	
2		5.20	16	29.40	34.60	There are many different types on 4 & 20P, please contact our Sales Rep. for more details! OEM/ODM projects welcome!!! Please contact us for spec. of Single Row headers!	
4	4.20	9.40	18	33.60	38.80		
6	8.40	13.60	20	37.80	43.00		
8	12.60	17.80	22	42.00	47.20		
10	16.80	22.00	24	46.20	51.40		
12	21.00	26.20					
14	25.20	30.40					