



Mobile Phone Battery Connector Spring Pin Type

■ MATERIAL

Insulator : Polyester
Contact Pin : YCUT-M-EH


■ SPECIFICATION

Current Rate : 0.5 AMP 50V AC/DC
Insulation Resistance : 100MΩMin. at DC 500V
Contact Resistance : 60mΩMax. at DC 20mA
Operation Temperature : -25°C to +85°C




■ Detail Dimensions



790-A2-A04GR1

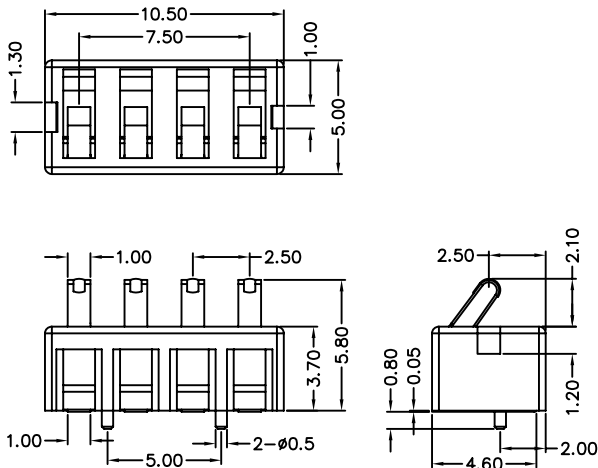



790-A2-B03GR1

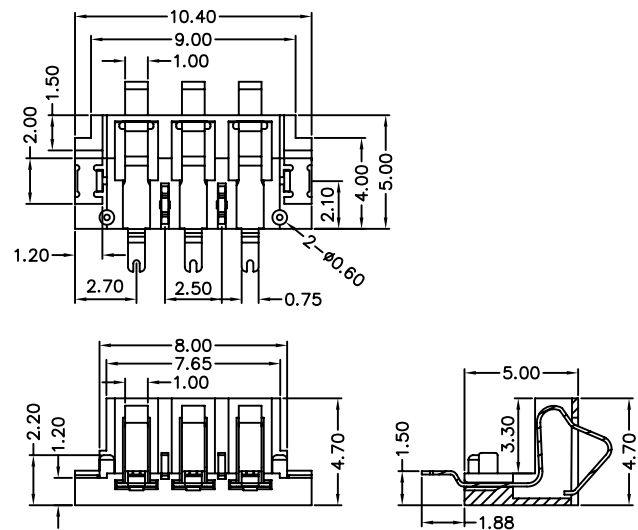

■ Recommended P.C.B Layout



■ User's Guide

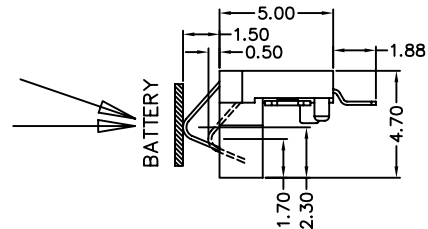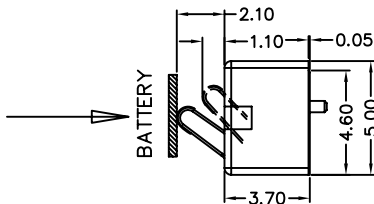

■ Order Information

790- A 2 - x xx G R 1
1 2 3

1. A: H=3.7mm SMT
B: H=4.7mm SMT
2. No. of contacts
3. G: Gold Flash

Unit: mm

Standard Parts
790-A2-A04GR1
790-A2-B03GR1