








# HEYClip™ MaxRunner® Cable Clip Array-Flush Mount

Accommodates up to 12 Cables, Flush Mount with Screws

*The Ultimate in Solar Wire Management*

- Designed to mount on flat panels or extrusions without mounting ledges.
- Easily attaches to any flat surface with four mounting screws.
- Patent Pending design is the ultimate in solar wire management.
- Holds up to 12 cables with wire diameters ranging from .20" (5,2 mm) to .28" (7,2 mm).
- Constructed from PPE+PS flame retardant “Noryl” material.
- The injection molded wire holder has a V0 flame rating and a UV (f1) rating for excellent resistance to outdoor exposure.
- Molded internal locking tabs securely hold the cables in place preventing side-to-side movement or slippage of the cables.

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE		PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT			
Minimum		Maximum		Maximum (12) Wires				in.	mm.	in.	mm.		
N/A: designed for flat mount				.20	.28	5,2	7,2	S6433	MaxRunner® 12 Flush Mount	3.00 x 3.13	76,2 - 79,5	1.00	25,4

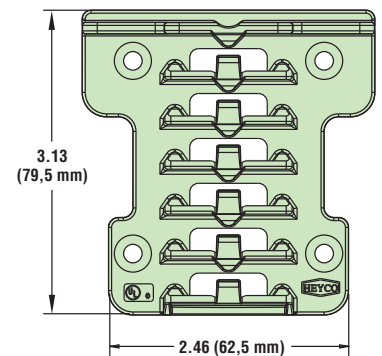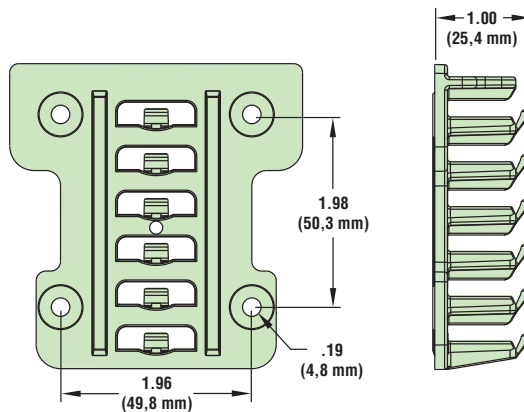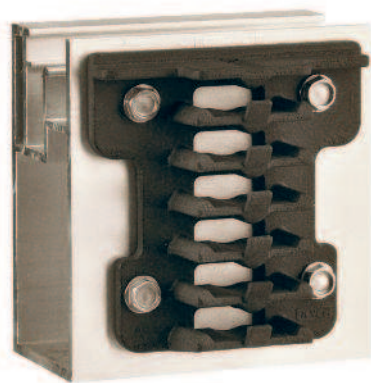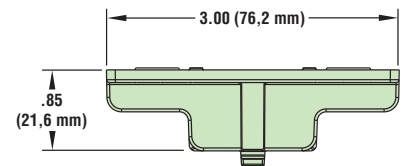

Quick Specs

Material Certifications



PPE & PS “Noryl”  
Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523

Flammability Rating  
Temperature Rating

94V-0  
Maximum material rating 203°F (95°C)